Versalis^{s}



S.I.N.



Versalis

S.I.N.

Scientific Evidence

› Research and development of products in partnership with renowned universities and institutes around the world such as:

KU Leuven - Belgium
University of Michigan - USA
UFF Brazil
UNESP - Brazil
USP - Brazil
SLmandic - Brazil

Global Presence

› One of the most important implant companies worldwide.

› Wide international presence.

Production Excellence

› Large investments in technological updating of our manufacturing facilities over the past three years in state of the art equipment.

› Annual production of over 5 million items.

Get to know our Smile Factory. Use your phone's camera to scan the QR code and take a 360° virtual tour of S.I.N.

Guaranteed Quality and Certifications

› Rigorous quality control of process, from the arrival of the raw material to the delivery of the final product, proven through national and international certifications.

ISO 9001 ISO 13485 CE FDA ISO 14001 ISO 45001



Versalis S PLUS

VERSATILITY ELEVATED TO ART

VERSALIS S was created for those who seek simplicity and performance.
Its conical core, dual-thread body, and cutting apex enable easier bicortical engagement and high torque, combined with the ultra-thin surface Plus, produced by double acid-etching and HAnano coating.




A SMART COMBINATION OF DESIGN AND VERSATILITY THAT REDEFINES SIMPLICITY




› **Hybrid Design, Smarter Mechanics:**

A dual-tapered body that balances compression and stress distribution, offering better bone-implant contact and long-term success, enhanced by the ultra-thin Surface Plus, treated with double acid-etching and HAnano coating.




› **Exclusive Plus surface:**

Developed in the main universities of Sweden, the Plus surface which is produced by double acid-etching followed by application of a hydroxyapatite coating HAnano, proven by over 50 preclinical studies.



› **An implant with diverse possibilities:**

Morse Taper 16° connection making your clinical day-to-day easier.



› **From 8.5 to 24 mm. One surgical kit:**

Standard, long or wide, all installed with the same kit.

Versalis S

ENGINEERED LIKE ART. CRAFTED FOR VERSATILITY.

With a dual-threaded design, conical core and cutting apex, **VERSALIS S** delivers clinical versatility, predictable torque, and reliable primary stability for professionals who value simplicity and performance.



SIMPLIFY YOUR CHOICES. AMPLIFY YOUR OUTCOMES.



› **Easy Bicortical Engagement:**

Dual taper body and aggressive apical design ensure easier bicortical anchorage, even in challenging bone anatomy.




› **Dual thread:**

Faster insertion, stable from the start.
Less time placing, more time producing.




› **Cutting Apex for Maximum Primary Stability:**

No extra steps. No over-prep. Versalis cuts its own path and achieves high initial stability with minimal bone trauma.



› **Manufactured in Cold Worked grade IV titanium:**

Super light metal, very resistant to corrosion, wear and fracture.



› **Treatment on the entire surface:**

Double acid etching on the entire surface.

Versalis S

- Indicated for all bone types, especially low-density bone, bicorticalization, and immediate or delayed loading.
- Versalis S can be used in various clinical situations, provided that the recommended drilling protocol is followed.
- Its exclusive macrogeometry ensures precision, efficiency, and torque predictability during surgery.


INDICATIONS FOR CLINICAL USE:

- **3.5 mm** – Central incisors and lateral incisors (upper and lower)
- **3.8 mm** – Central incisors and lateral incisors (upper), canines and premolars
- **4.0 mm** – Central incisors (upper), canines, premolars and molars
- **4.3 mm** – Canines, premolars and molars
- **5.0 mm** – Molars
- **6.0 mm** – Molars
- **7.0 mm** – Molars

- **1.5 mm infra-bone installation**
- **Initial drill speed:** 1200 rpm
- **Speed of the drills 3.5 to 7.0mm:** 800 rpm
- **Countersink speed:** 600-800 rpm
- **Implant Insertion Speed:** 20 to 40 rpm
- **Maximum torque:** 80 N.cm
- **Immediate loading*:** recommended torque from 45 to 80 N.cm
- **Includes cover screw of 2.0mm**


* Relative contraindication in patients with systemic or local problems and at the professional's discretion

ONE CONNECTION PLATFORM

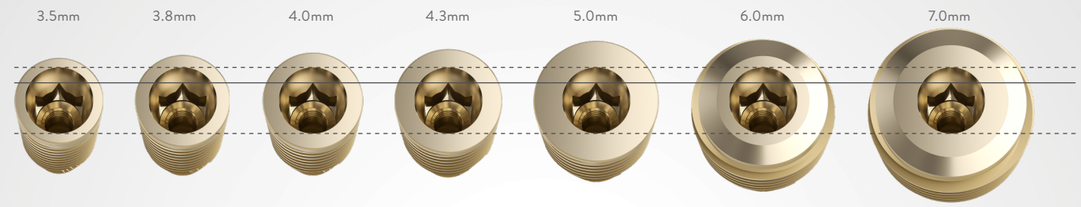

All Versalis Implants feature the 16º Morse Taper Connection with Platform Switch, providing one single connection for all implant diameters.

TECHNICAL MEASURES

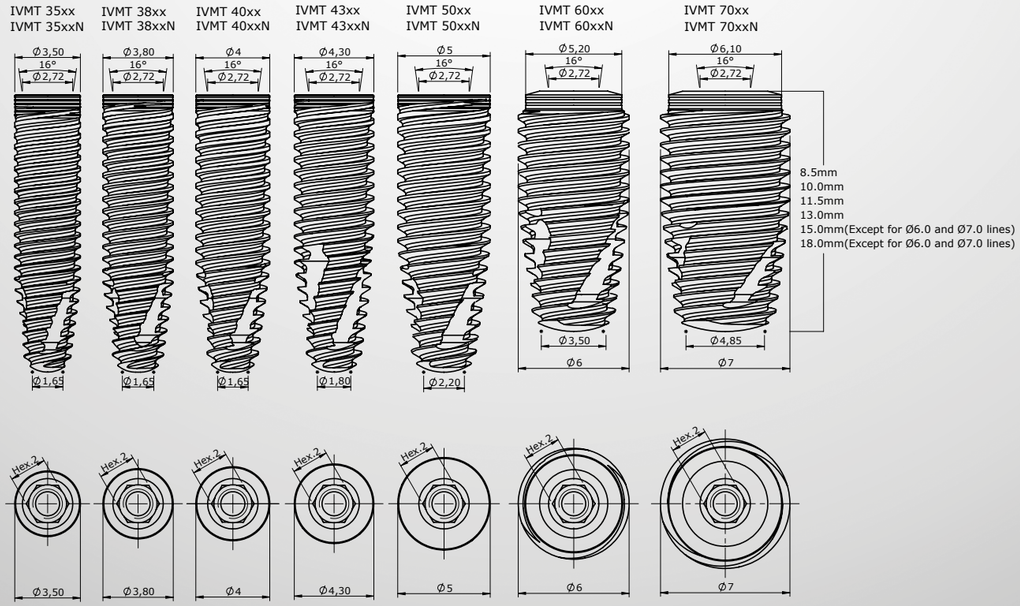

DRILLING SEQUENCE VERSALIS S

SOFT BONE



IMPLANT	Initial (FRL 20)	Lindemann (FRLI 01)	Helical (FRH 20)	Ø3.5 (FRCV 35S)	Ø3.5 (FRCTV 35)	Ø3.8 (FRCV 38S)	Ø3.8 (FRCTV 38)	Ø4.0 (FRCV 40S)	Ø4.0 (FRCTV 40)	Ø4.3 (FRCV 43S)	Ø4.3 (FRCTV 43)	Ø5.0 (FRCV 50S)	Ø5.0 (FRCTV 50)	Ø6.0 (FRCV 60S)	Ø7.0 (FRCV 70S)
IVMT 35xx	●	●	●	● ●											
IVMT 38xx	●	●	●	●		● ●									
IVMT 40xx	●	●	●	●		●		● ●							
IVMT 43xx	●	●	●	●		●		●		● ●					
IVMT 50xx	●	●	●	●		●		●		●		● ●			
IVMT 60xx	●	●	●	●		●		●		●		●		● ●	
IVMT 70xx	●	●	●	●		●		●		●		●		●	● ●

● Optional ● Optional in case of very soft bone Initial Drill speed of 1200 rpm Conical Drill speed of 800 rpm Countersink Drill speed of 600 to 800 rpm

HARD BONE



IMPLANT	Initial (FRL 20)	Lindemann (FRLI 01)	Helical (FRH 20)	Ø3.5 (FRCV 35H)	Ø3.5 (FRCTV 35)	Ø3.5 (FRCV 35S)	Ø3.8 (FRCV 38H)	Ø3.8 (FRCTV 38)	Ø3.8 (FRCV 38S)	Ø4.0 (FRCV 40H)	Ø4.0 (FRCTV 40)	Ø4.0 (FRCV 40S)	Ø4.3 (FRCV 43H)	Ø4.3 (FRCTV 43)	Ø4.3 (FRCV 43S)	Ø5.0 (FRCV 50H)	Ø5.0 (FRCTV 50)
IVMT 35xx	●	●	●	●	●												
IVMT 38xx	●	●	●			●	●	●									
IVMT 40xx	●	●	●			●			●	●	●						
IVMT 43xx	●	●	●			●			●			●	●	●			
IVMT 50xx	●	●	●			●			●			●			●	●	●

● Optional Initial Drill speed of 1200 rpm Conical Drill speed of 800 rpm Countersink Drill speed of 600 to 800 rpm

MT 16° PROSTHETIC SEQUENCE

DIRECT SEQUENCE OVER THE IMPLANT (ANALOG)


Single restorations



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.



1

TITANIUM HEALING CAP

CODE	DIAM. (mm)	LENGTH (mm)
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0



1

10 N.cm

PEEK HEALING CAP

CODE	PROFILE DIAM. (mm)	LENGTH (mm)
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



1

OPEN TRAY TRANSFER

CODE	DIAM. (mm)
TMAIM 35C	3.5
TMAIM 45C	4.5



1

CLOSED TRAY TRANSFER

CODE	DIAM. (mm)
TMFIM 35C	3.5
TMFIM 45C	4.5



ANALOG

CODE
ANMP 3800



1

20 N.cm

TEMPORARY TITANIUM CYLINDER

CODE	DIAM. (mm)	LENGTH (mm)
CPTM 3501 - H	3.5	1.0
CPTM 3502 - H	3.5	2.0
CPTM 3503 - H	3.5	3.0
CPTM 3504 - H	3.5	4.0
CPTM 4501 - H	4.5	1.0
CPTM 4502 - H	4.5	2.0
CPTM 4503 - H	4.5	3.0
CPTM 4504 - H	4.5	4.0



1

20 N.cm

STRAIGHT CEMENTED ABUTMENT

CODE	DIAM. (mm)	LENGTH (mm)
AIMP 3501C-H	3.5	1.0
AIMP 3502C-H	3.5	2.0
AIMP 3503C-H	3.5	3.0
AIMP 3504C-H	3.5	4.0
AIMP 3505C-H	3.5	5.0
AIMP 4501C-H	4.5	1.0
AIMP 4502C-H	4.5	2.0
AIMP 4503C-H	4.5	3.0
AIMP 4504C-H	4.5	4.0
AIMP 4505C-H	4.5	5.0



1

20 N.cm

CO-CR ABUTMENT (NO INTERNAL THREAD)

CODE	DIAM. (mm)	LENGTH (mm)
EUCLAM 3501 - H	3.5	1.0
EUCLAM 3502 - H	3.5	2.0
EUCLAM 3503 - H	3.5	3.0
EUCLAM 3504 - H	3.5	4.0
EUCLAM 4501 - H	4.5	1.0
EUCLAM 4502 - H	4.5	2.0
EUCLAM 4503 - H	4.5	3.0
EUCLAM 4504 - H	4.5	4.0



1

LABORATORY SCREW

CODE
PTMAML 16 LONG
PTL 16 SHORT
1.6mm screw




1

20 N.cm

RETAINING SCREW

CODE
PT 16

DRIVERS




1

Driver Handpiece Hex. 1.2mm Short (CTH 1220)

Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)

Driver Ratchet Hex. 1.2mm (CDHC 24)

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° PROSTHETIC SEQUENCE

DIRECT SEQUENCE ON IMPLANT (DIGITAL)

Single restorations



IMPLANT

CODE VERSALIS S	*CODE VERSALIS S PLUS*	*DIAM. (mm)*	*LENGTH (mm)*
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.



1

TITANIUM HEALING CAP

CODE	*DIAM. (mm)*	*HEIGHT (mm)*
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0



1

10 N.cm

PEEK HEALING CAP

CODE	*PROFILE DIAM. (mm)*	*HEIGHT (mm)*
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



1

MT 16° SCANNING JIG

CODE

JBSWCM



1

MT 16° SCANNING JIG

CODE

JBSWCMC



DIGITAL ANALOG - MT 16°

CODE

ADCM



1

20 N.cm

TITANIUM BASE MT 16° SIRONA

S.I.N. PLATFORM	*TRANSM. HEIGHT (mm)*	*SIRONA LIBRARY*
ICM 0504	0,5	ATOS 3.5/4.0 - ATOS 4.5/5.0
ICM 0804	0,8	ATOS 3.5/4.0 - ATOS 4.5/5.0
ICM 1504	1,5	ATOS 3.5/4.0 - ATOS 4.5/5.0
ICM 2004	2,0	ATOS 3.5/4.0 - ATOS 4.5/5.0
ICM 3004	3,0	ATOS 3.5/4.0 - ATOS 4.5/5.0
ICM 4004	4,0	ATOS 3.5/4.0 - ATOS 4.5/5.0
ICM 5004	5,0	ATOS 3.5/4.0 - ATOS 4.5/5.0



1

20 N.cm

TITANIUM BASE MT 16°

CODE	*DESCRIP.*	*DIAM. (mm)*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMT 0504	3.5X0.5X4	3.5	0.5	4
ICMT 0506	3.5X0.5X6	3.5	0.5	6
ICMT 1004	3.5X1.0X4	3.5	1.0	4
ICMT 1006	3.5X1.0X6	3.5	1.0	6
ICMT 2004	3.5X2.0X4	3.5	2.0	4
ICMT 2006	3.5X2.0X6	3.5	2.0	6
ICMT 3004	3.5X3.0X4	3.5	3.0	4
ICMT 3006	3.5X3.0X6	3.5	3.0	6
ICMT 4004	3.5X4.0X4	3.5	4.0	4
ICMT 4006	3.5X4.0X6	3.5	4.0	6



1

20 N.cm

TITANIUM BASE MT 16° REGULAR

CODE	*DESCRIP.*	*DIAM. (mm)*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMT 0504R	4.5X0.5X4	4.5	0.5	4
ICMT 0506R	4.5X0.5X6	4.5	0.5	6
ICMT 1004R	4.5X1.0X4	4.5	1.0	4
ICMT 1006R	4.5X1.0X6	4.5	1.0	6
ICMT 2004R	4.5X2.0X4	4.5	2.0	4
ICMT 2006R	4.5X2.0X6	4.5	2.0	6
ICMT 3004R	4.5X3.0X4	4.5	3.0	4
ICMT 3006R	4.5X3.0X6	4.5	3.0	6
ICMT 4004R	4.5X4.0X4	4.5	4.0	4
ICMT 4006R	4.5X4.0X6	4.5	4.0	6




1

20 N.cm

TITANIUM BASE MT 16° WIDE

CODE	*DESCRIP.*	*DIAM. (mm)*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMT 0504W	5.5X0.5X4	5.5	0.5	4
ICMT 0506W	5.5X0.5X6	5.5	0.5	6
ICMT 1004W	5.5X1.0X4	5.5	1.0	4
ICMT 1006W	5.5X1.0X6	5.5	1.0	6
ICMT 2004W	5.5X2.0X4	5.5	2.0	4
ICMT 2006W	5.5X2.0X6	5.5	2.0	6
ICMT 3004W	5.5X3.0X4	5.5	3.0	4
ICMT 3006W	5.5X3.0X6	5.5	3.0	6
ICMT 4004W	5.5X4.0X4	5.5	4.0	4
ICMT 4006W	5.5X4.0X6	5.5	4.0	6

DRIVERS



1

Driver Handpiece Hex. 1.2mm Short (CTH 1220)

Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)

Driver Ratchet Hex. 1.2mm Short (CDHC 20)

Driver Ratchet Hex. 1.2mm (CDHC 24)

DRIVERS



2

Driver Handpiece Hex. 1.4mm Short Ang. (CTH 1420A)

Driver Handpiece Hex. 1.4mm Medium Ang. (CTH 1424A)

Driver Handpiece Hex. 1.4mm Long Ang. (CTH 1430A)

Driver Handpiece Hex. 1.4mm Ext. Long Ang. (CTH 1437A)

Driver Ratchet Hex. 1.4 Short Ang. (CCH 1420A)

Driver Ratchet Hex. 1.4mm Medium Ang. (CCH 1424A)

Driver Ratchet Hex. 1.4mm Long Ang. (CCH 1430A)

Driver Ratchet Hex. 1.4mm Ext. Long Ang. (CCH 1437A)



2

20 N.cm

ANGLED TI BASE

CODE	*DESCRIPTION*	*DIAM.*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMTA 0504	3.5X0.5X4	3.5	0.5	4
ICMTA 0506	3.5X0.5X6	3.5	0.5	6
ICMTA 1004	3.5X1.0X4	3.5	1.0	4
ICMTA 1006	3.5X1.0X6	3.5	1.0	6
ICMTA 2004	3.5X2.0X4	3.5	2.0	4
ICMTA 2006	3.5X2.0X6	3.5	2.0	6
ICMTA 3004	3.5X3.0X4	3.5	3.0	4
ICMTA 3006	3.5X3.0X6	3.5	3.0	6
ICMTA 4004	3.5X4.0X4	3.5	4.0	4
ICMTA 4006	3.5X4.0X6	3.5	4.0	6



2

20 N.cm

ANGLED TI BASE SLIM

CODE	*DESCRIPTION*	*DIAM.*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMTA 0504S	4.0X0.5X4	4.0	0.5	4
ICMTA 0506S	4.0X0.5X6	4.0	0.5	6
ICMTA 1004S	4.0X1.0X4	4.0	1.0	4
ICMTA 1006S	4.0X1.0X6	4.0	1.0	6
ICMTA 2004S	4.0X2.0X4	4.0	2.0	4
ICMTA 2006S	4.0X2.0X6	4.0	2.0	6
ICMTA 3004S	4.0X3.0X4	4.0	3.0	4
ICMTA 3006S	4.0X3.0X6	4.0	3.0	6
ICMTA 4004S	4.0X4.0X4	4.0	4.0	4
ICMTA 4006S	4.0X4.0X6	4.0	4.0	6



2

20 N.cm

ANGLED TI BASE REGULAR

CODE	*DESCRIPTION*	*DIAM.*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMTA 0504R	4.5X0.5X4	4.5	0.5	4
ICMTA 0506R	4.5X0.5X6	4.5	0.5	6
ICMTA 1004R	4.5X1.0X4	4.5	1.0	4
ICMTA 1006R	4.5X1.0X6	4.5	1.0	6
ICMTA 2004R	4.5X2.0X4	4.5	2.0	4
ICMTA 2006R	4.5X2.0X6	4.5	2.0	6
ICMTA 3004R	4.5X3.0X4	4.5	3.0	4
ICMTA 3006R	4.5X3.0X6	4.5	3.0	6
ICMTA 4004R	4.5X4.0X4	4.5	4.0	4
ICMTA 4006R	4.5X4.0X6	4.5	4.0	6



2

20 N.cm

ANGLED TI BASE WIDE

CODE	*DESCRIPTION*	*DIAM.*	*TRANSM. HEIGHT (mm)*	*LENGTH (mm)*
ICMTA 0504W	5.5X0.5X4	5.5	0.5	4
ICMTA 0506W	5.5X0.5X6	5.5	0.5	6
ICMTA 1004W	5.5X1.0X4	5.5	1.0	4
ICMTA 1006W	5.5X1.0X6	5.5	1.0	6
ICMTA 2004W	5.5X2.0X4	5.5	2.0	4
ICMTA 2006W	5.5X2.0X6	5.5	2.0	6
ICMTA 3004W	5.5X3.0X4	5.5	3.0	4
ICMTA 3006W	5.5X3.0X6	5.5	3.0	6
ICMTA 4004W	5.5X4.0X4	5.5	4.0	4
ICMTA 4006W	5.5X4.0X6	5.5	4.0	6

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° PROSTHETIC SEQUENCE

UNIVERSAL ABUTMENT - PRE-MADE POSTS (ANALOG AND DIGITAL)

Cement retained restorations



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7,0	13.0

*Check product availability in your country.



1

TITANIUM HEALING CAP

CODE	DIAM. (mm)	HEIGHT (mm)
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0



1

10 N.cm

PEEK HEALING CAP

CODE	PROFILE DIAM. (mm)	HEIGHT (mm)
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



1

20 N.cm

CEMENTED UNIVERSAL ABUTMENT

CODE	DIAM. (mm)	CEMENTATION LENGTH (mm)	TRANSMUCOSAL LENGTH (mm)
AIM 33401C	3.3	4.0	1.0
AIM 33402C	3.3	4.0	2.0
AIM 33403C	3.3	4.0	3.0
AIM 33404C	3.3	4.0	4.0
AIM 33405C	3.3	4.0	5.0
AIM 33601C	3.3	6.0	1.0
AIM 33602C	3.3	6.0	2.0
AIM 33603C	3.3	6.0	3.0
AIM 33604C	3.3	6.0	4.0
AIM 33605C	3.3	6.0	5.0
AIM 45401C	4.5	4.0	1.0
AIM 45402C	4.5	4.0	2.0
AIM 45403C	4.5	4.0	3.0
AIM 45404C	4.5	4.0	4.0
AIM 45405C	4.5	4.0	5.0
AIM 45601C	4.5	6.0	1.0
AIM 45602C	4.5	6.0	2.0
AIM 45603C	4.5	6.0	3.0
AIM 45604C	4.5	6.0	4.0
AIM 45605C	4.5	6.0	5.0



POLYACETAL TRANSFER

CODE	DIAM. (mm)	HEIGHT (MM)	
TSIT 3340	3.3	4.0	yellow
TSIT 3360	3.3	6.0	blue
TSIT 4540	4.5	4.0	yellow
TSIT 4560	4.5	6.0	blue



GRADE 5 TITANIUM ANALOG

CODE	DIAM. (mm)	HEIGHT (MM)
ASIT 3340	3.3	4.0
ASIT 3360	3.3	6.0
ASIT 4540	4.5	4.0
ASIT 4560	4.5	6.0



TEMPORARY ACRYLIC CYLINDER

CODE	DIAM. (mm)	HEIGHT (MM)
CPSIT 3340	3.3	4.0
CPSIT 3360	3.3	6.0
CPSIT 4540	4.5	4.0
CPSIT 4560	4.5	6.0



CALCINABLE POLYACETAL CYLINDER

CODE	DIAM. (mm)	HEIGHT (MM)
CCSIT 3340	3.3	4.0
CCSIT 3360	3.3	6.0
CCSIT 4540	4.5	4.0
CCSIT 4560	4.5	6.0



UNIVERSAL ABUTMENT SCANNING JIG

CODE	DIAM. (mm)	HEIGHT (mm)
JBSIT 3340	3.3	4.0
JBSIT 3360	3.3	6.0
JBSIT 4540	4.5	4.0
JBSIT 4560	4.5	6.0



UNIVERSAL ABUTMENT DIGITAL ANALOG

CODE	DIAM. (mm)	HEIGHT (mm)
ADUA 3340	3.3	4.0
ADUA 3360	3.3	6.0
ADUA 4540	4.5	4.0
ADUA 4560	4.5	6.0

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)



Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

* Analog sequence
* Digital sequence

* Hex driver
* Anti-Rotational component
* Squared Screw
* Abutment Screw
* Rotational component

VERSALIS S

MT 16° PROSTHETIC SEQUENCE

MULTI-UNIT ABUTMENT (ANALOG AND DIGITAL)

Multiple screw retained restorations



IMPLANT

CODE VERSALIS S	*CODE VERSALIS S PLUS*	*DIAM. (mm)*	*LENGTH (mm)*
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.




2

20 N.cm

STRAIGHT MULTI-UNIT ABUTMENT

CODE	*DIAM. (mm)*	*HEIGHT (mm)*
MAM 4801 C	4.8	1.0
MAM 4802 C	4.8	2.0
MAM 4803 C	4.8	3.0
MAM 4804 C	4.8	4.0



3

20 N.cm

INDEXED ANGLED MULTI-UNIT ABUTMENT

CODE	*DIAM. (mm)*	*HEIGHT (mm)*	*ANG.*
MAAM 4802I	4.8	2.0	17°
MAAM 4803I	4.8	3.0	17°
MAAM 4804I	4.8	4.0	17°
MAAM 4832I	4.8	2.0	30°
MAAM 4833I	4.8	3.0	30°
MAAM 4834I	4.8	4.0	30°

*Use hexagonal driver 1.2 mm



1

ABUTMENT PROTECTOR

CODE

PMA 4855

5.0 mm profile



1

OPEN TRAY TRANSFER

CODE

TMAM 4800



1

CLOSED TRAY TRANSFER

CODE

TMFM 4800



ANALOG

CODE

ANMA 4800



1

MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMA



1

MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMAC



1

10 N.cm

TEMPORARY TITANIUM CYLINDER

CODE	
PTM 4800-3	For straight multi-unit
PTMS 4800-3	For straight multi-unit Suitable for laser welding
PTM 4800-2	For angled multi-unit



1

10 N.cm

CALCINABLE AND CO-CR CYLINDER

CODE	
CPM 4800-3	Plastic/For straight multi-unit
CLEM 4800-3	Cobalt chrome/For straight multi-unit
CPM 4800-2	Plastic/For angled multi-unit
CLEM 4800-2	Cobalt chrome/For angled multi-unit



DIGITAL ANALOG MULTI-UNIT ABUT

CODE

ADMA



POLISHING PROTECTOR

CODE

PPM 01



1

10 N.cm

TITANIUM INTERFACE MULTI-UNIT ABUT

CODE	**LENGTH (mm)**
IMAT 04	4.0
IMAT 06	6.0



1

10 N.cm

CHROME INTERFACE MULTI-UNIT ABUT

CODE	**LENGTH (mm)**
IMAC 04	4.0
IMAC 06	6.0



1

LABORATORY SCREW

CODE	*DIAM. (mm)*
PL 1405 Short	1.4
PTMA 13-1 Long	1.4



1

10 N.cm

RETAINING SCREW

CODE	*HEIGHT (mm)*	
PRH 20	2.0	For angled multi-unit



1

10 N.cm

RETAINING SCREW PACK 4

CODE	*HEIGHT (mm)*	
PRH 30	3.0	For straight multi-unit

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)


2



Driver Handpiece P/ Abut. Medium (CTA 1224)



Driver Ratchet F/ Abut. Short (CDAC 20)




Driver Ratchet F/ Abut. Medium (CDAC 24)

3



Driver Handpiece Hex. 1.2mm Nar. Short (CTHA 1220)



Driver Handpiece Hex. 1.2mm Nard. Medium (CTHA 1224)



Driver Ratchet Hex. 1.2mm Nar. Short (CHTMA 20)



Driver Ratchet Hex. 1.2mm Medium (CHTMA 24)

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° PROSTHETIC SEQUENCE

MICRO MULTI-UNIT ABUTMENT (ANALOG AND DIGITAL)

Single and Multiple Screw retained restorations



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.



20 N.cm

MICRO MULTI-UNIT ABUTMENT

CODE	DIAM. (mm)	HEIGHT (mm)
MAM 3301	3.5	1.0
MAM 3302	3.5	2.0
MAM 3303	3.5	3.0
MAM 3304	3.5	4.0



ABUTMENT PROTECTOR

CODE

PMM 33



OPEN TRAY TRANSFER

CODE

TMM 3306



CLOSED TRAY TRANSFER

CODE

TMMF 3306



ANALOG

CODE

AMMA 33



10 N.cm

TEMPORARY TITANIUM CYLINDER

CODE

CPMT 3306



10 N.cm

CALCINABLE AND CO-CR CYLINDER

CODE

CPMC 33	
CPMM 33	Cobalt chrome
CPMC 3306	
CPMM 3306	Cobalt chrome



LABORATORY SCREW

CODE

PTMMA 14



10 N.cm

RETAINING SCREW

CODE	LENGTH (mm)
PRH 3035	2.0



POLISHING PROTECTOR

CODE

PPMM 33

PPMM 3306



10 N.cm

TITANIUM INTERFACE MICRO MULTI-UNIT ABUT

CODE	LENGTH (mm)	
IMMAT 04	4.0	
IMMAT 06	6.0	
IMMAT 0406	4.0	⬡
IMMAT 0606	6.0	⬡



10 N.cm

CHROME INTERFACE MICRO MULTI-UNIT ABUT

CODE	LENGTH (mm)	
IMMAC 04	4.0	
IMMAC 06	6.0	
IMMAC 0406	4.0	⬡
IMMAC 0606	6.0	⬡



MICRO MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMMA

JBMMA06



MICRO MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMMAC

JBMMA 06C



DIGITAL ANALOG MICRO MULTI-UNIT ABUT

CODE

ADMMA

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

2



Driver Handpiece P/ Abut. Medium (CTA 1224)



Driver Ratchet F/ Abut. Short (CDAC 20)



Driver Ratchet F/ Abut. Medium (CDAC 24)

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° PROSTHETIC SEQUENCE

CONICAL ABUTMENT (ANALOG AND DIGITAL)

Single and multiple screw retained restorations



IMPLANT

CODE VERSALIS S	*CODE VERSALIS S PLUS*	*DIAM. (mm)*	*LENGTH (mm)*
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.



20 N.cm

CONICAL ABUTMENT

CODE	*DIAM. (mm)*	*LENGTH (mm)*
ACM 4801C	4.8	1.0
ACM 4802C	4.8	2.0
ACM 4803C	4.8	3.0
ACM 4804C	4.8	4.0



ABUTMENT PROTECTOR

CODE

PA 4855

5.0 mm profile



OPEN TRAY TRANSFER

CODE

TMAA 4800

TMAA 4806



CLOSED TRAY TRANSFER

CODE

TMFA 4800

TMFA 4806



ANALOG

CODE

ANAC



10 N.cm

TEMPORARY TITANIUM CYLINDER

CODE

PTA 4800-3

PTA 4806-3



10 N.cm

CALCINABLE AND CO-CR CYLINDER

CODE


CPAC 00-3	Plastic
CALE 00-3	Cobalt chrome
CPAC 06-3	Plastic
CALE 06-3	Cobalt chrome



POLISHING PROTECTOR

CODE

PPAC 01



LABORATORY SCREW

CODE	DIAM. (mm)
PL 1405 Short	1.4
PTMA 13-1 Long	1.4



10 N.cm

RETAINING SCREW PACK 4

CODE	*HEIGHT (mm)*
PRH 30	3.0



CONICAL ABUTMENT SCANNING JIG

CODE

JBAC 00

JBAC 06



CONICAL ABUTMENT SCANNING JIG

CODE

JBAC 00C

JBAC 06C



CONICAL ABUTMENT DIGITAL ANALOG

CODE

ADAC



10 N.cm

TITANIUM INTERFACE CONICAL ABUT

CODE	LENGTH (mm)	
IACT 0400	4.0	
IACT 0406	4.0	⊙
IACT 0600	6.0	
IACT 0606	6.0	⊙



10 N.cm

CHROME INTERFACE CONICAL ABUT

CODE	LENGTH (mm)	
IACC 0400	4.0	
IACC 0406	4.0	⊙
IACC 0600	6.0	
IACC 0606	6.0	⊙

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

2



Driver Handpiece P/ Abut. Medium (CTA 1224)



Driver Ratchet F/ Abut. Short (CDAC 20)



Driver Ratchet F/ Abut. Medium (CDAC 24)

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° PROSTHETIC SEQUENCE

MULTIFUNCTIONAL ABUTMENT (ANALOG AND DIGITAL)

Single and Multiple screw retained restorations



IMPLANT

CODE VERSALIS S	*CODE VERSALIS S PLUS*	*DIAM. (mm)*	*LENGTH (mm)*
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.



2

32 N.cm

MULTIFUNCTIONAL ABUTMENT

CODE	*DIAM. (mm)*	*HEIGHT (mm)*
AMCM 4801	4.8	1.0
AMCM 4802	4.8	2.0
AMCM 4803	4.8	3.0
AMCM 4804	4.8	4.0

*Use hexagonal driver 1.6 mm



1

ABUTMENT PROTECTOR

CODE

PAM 48



1

OPEN TRAY TRANSFER

CODE

TMAAM 00

TMAAM 06



1

CLOSED TRAY TRANSFER

CODE

TMFAM 00

TMFAM 06



ANALOG

CODE

ANAM



1

MULTIFUNCTIONAL ABUT SCANNING JIG

CODE

JBAM00

JBAM06



1

MULTIFUNCTIONAL ABUT SCANNING JIG

CODE

JBAM 00C

JBAM 06C



1

10 N.cm

TEMPORARY TITANIUM CYLINDER

CODE

PTAM 00

PTAM 06



1

10 N.cm

CALCINABLE AND CO-CR CYLINDER

CODE

CCAM 00	Plastic
CCAM 06	Plastic
CCRAM 00	Cobalt chrome
CCRAM 06	Cobalt chrome



DIGITAL ANALOG ABUT MULT

CODE

ADAM



POLISHING PROTECTOR

CODE

PPAM 01



1

LABORATORY SCREW

CODE	*DIAM. (mm)*
PTMAL 01	1.4



1

10 N.cm

RETAINING SCREW

CODE	*LENGTH (mm)*
PRA 01	2.0



1

10 N.cm

CHROME INTERFACE MULTIFUNCTIONAL ABUT

CODE	LENGTH (mm)	
IAMC 0400	4.0	
IAMC 0600	6.0	
IAMC 0406	4.0	⬡
IAMC 0606	6.0	⬡



1

10 N.cm

TITANIUM INTERFACE MULTIFUNCTIONAL ABUT


CODE	LENGTH (mm)	
IAMT 0400	4.0	
IAMT 0600	6.0	
IAMT 0406	4.0	⬡
IAMT 0606	6.0	⬡

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)




Driver Ratchet Hex. 1.2mm (CDHC 24)

2



Driver Handpiece Hex. 1.6mm Short (CTH 1620)



Driver Handpiece Hex. 1.6mm Medium (CTH 1624)



Driver Ratchet Hex. 1.6mm Short (CCH 1620)



Driver Ratchet Hex. 1.6mm Medium (CCH 1624)

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° PROSTHETIC SEQUENCE

PRE-MILLED ABUTMENTS

SINGLE PERSONALIZED RESTORATIONS



IMPLANT

CODE VERSALIS S	*CODE VERSALIS S PLUS*	*DIAM. (mm)*	*LENGTH (mm)*
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4.0	8.5
IVMT 4010	IVMT 4010N	4.0	10.0
IVMT 4011	IVMT 4011N	4.0	11.5
IVMT 4013	IVMT 4013N	4.0	13.0
IVMT 4015	IVMT 4015N	4.0	15.0
IVMT 4018	IVMT 4018N	4.0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5.0	8.5
IVMT 5010	IVMT 5010N	5.0	10.0
IVMT 5011	IVMT 5011N	5.0	11.5
IVMT 5013	IVMT 5013N	5.0	13.0
IVMT 5015	IVMT 5015N	5.0	15.0
IVMT 5018	IVMT 5018N	5.0	18.0
IVMT 6085	IVMT 6085N	6.0	8.5
IVMT 6010	IVMT 6010N	6.0	10.0
IVMT 6011	IVMT 6011N	6.0	11.5
IVMT 6013	IVMT 6013N	6.0	13.0
IVMT 7085	IVMT 7085N	7.0	8.5
IVMT 7010	IVMT 7010N	7.0	10.0
IVMT 7011	IVMT 7011N	7.0	11.5
IVMT 7013	IVMT 7013N	7.0	13.0

*Check product availability in your country.



1

TITANIUM HEALING CAP

CODE	DIAM. (mm)	LENGTH (mm)
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0



1

10 N.cm

PEEK HEALING CAP

CODE	PROFILE DIAM. (mm)	HEIGHT (mm)
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



1

MT 16° SCANNING JIG

CODE
JBSWCMC



1

MT 16° SCANNING JIG

CODE
JBSWCM



MT 16° DIGITAL ANALOG

CODE
ADCM



1

PRE-MILLED

CODE
AFTCM 1601DS*
AFTCM 1602DS*
AFTCM 1601MK**
AFTCM 1602MK**

*Compatible with DESS Holder
**Compatible with MEDENTIKA Holder

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)



Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

VERSALIS S

* Analog sequence
* Digital sequence

* Hex driver
* Anti-Rotational component
* Squared Screw
* Abutment Screw
* Rotational component

Versalis S LONG

- Indicated for intraoral surgical placement in the maxilla, preferably in bones type III and IV (low density bones), for total edentulism cases, bicorticalization, immediate and delayed loading.
- Versalis S can be used in various clinical situations, provided that the recommended drilling protocol is followed.
- Its exclusive macrogeometry ensures precision, efficiency, and torque predictability during surgery.
- Internal angulation: 16°.

INDICATIONS FOR CLINICAL USE:

- **3.8 mm** - Anterior region
- **4.0 mm** - Anterior and posterior region
- **4.3 mm** - Posterior region

- **1.5 mm infra-bone installation**
- **Initial drill speed:** 1200 rpm
- **Speed of the drills 3.8 to 4.3mm:** 800 rpm.
- **Implant Insertion Speed:** 20 to 40 rpm
- **Maximum torque:** 80 N.cm
- **Immediate loading*:** recommended torque from 45 to 80 N.cm
- Includes cover screw of 2.0mm

* Relative contraindication in patients with systemic or local problems and at the professional's discretion

DRILLING SEQUENCE VERSALIS S LONG

BONE TYPES III AND IV



Ø DIAM. (mm)	Initial (FRLL 20)	Helical (FRHL 20)	Ø3.8 (FRCVL 38)	Ø4.0 (FRCVL 40)	Ø4.3 (FRCVL 43)
3.8	●	●	● ●		
4.0	●	●	●	● ●	
4.3	●	●	●	●	● ●


● Optional ● Optional in case of very soft bone

Initial Drill speed of 1200 rpm


Conical Drill speed of 800 rpm

SINGLE CONNECTION. SMARTER WORKFLOW.

All Versalis Long Implants feature the 16° Morse Taper Connection with Platform Switch, providing one single connection for all implant diameters

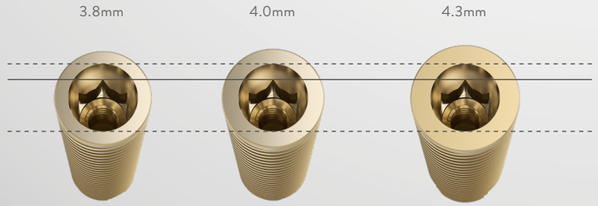

TECHNICAL MEASURES

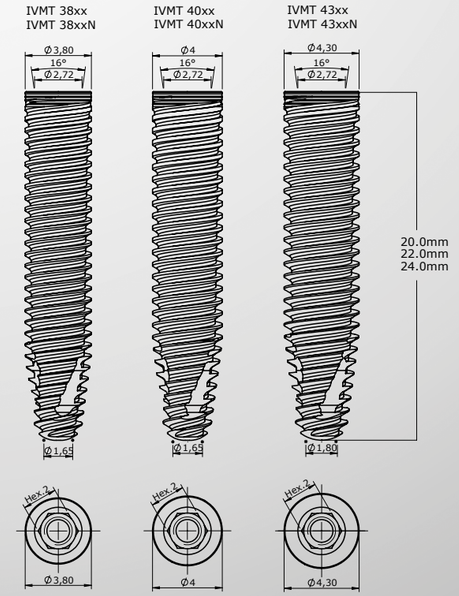

MT 16° LONG PROSTHETIC SEQUENCE

MULTI-UNIT ABUTMENT (ANALOGIC AND DIGITAL)

Multiple screw retained restorations



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3820	IVMT 3820N	3.8	20.0
IVMT 3822	IVMT 3822N	3.8	22.0
IVMT 3824	IVMT 3824N	3.8	24.0
IVMT 4020	IVMT 4020N	4.0	20.0
IVMT 4022	IVMT 4022N	4.0	22.0
IVMT 4024	IVMT 4024N	4.0	24.0
IVMT 4320	IVMT 4320N	4.3	20.0
IVMT 4322	IVMT 4322N	4.3	22.0
IVMT 4324	IVMT 4324N	4.3	24.0



2

20 N.cm

STRAIGHT MULTI-UNIT ABUTMENT

CODE	DIAM. (mm)	HEIGHT (mm)
MAM 4801 C	4.8	1.0
MAM 4802 C	4.8	2.0
MAM 4803 C	4.8	3.0
MAM 4804 C	4.8	4.0



3

20 N.cm

INDEXED ANGLED MULTI-UNIT ABUTMENT

CODE	DIAM. (mm)	HEIGHT (mm)	ANG.
MAAM 4802I	4.8	2.0	17°
MAAM 4803I	4.8	3.0	17°
MAAM 4804I	4.8	4.0	17°
MAAM 4832I	4.8	2.0	30°
MAAM 4833I	4.8	3.0	30°
MAAM 4834I	4.8	4.0	30°

*Use hexagonal driver 1.2 mm



1

ABUTMENT PROTECTOR

CODE

PMA 4855

5.0 mm profile



1

OPEN TRAY TRANSFER

CODE

TMAM 4800



1

CLOSED TRAY TRANSFER

CODE

TMFM 4800



ANALOG

CODE

ANMA 4800



1

10 N.cm

TEMPORARY TITANIUM CYLINDER

CODE

PTM 4800-3	For straight multi-unit
PTMS 4800-3	For straight multi-unit Suitable for laser welding
PTM 4800-2	For angled multi-unit



1

10 N.cm

CALCINABLE AND CO-CR CYLINDER

CODE

CPM 4800-3	Plastic For straight multi-unit
CLEM 4800-3	Cobalt chrome For straight multi-unit
CPM 4800-2	Plastic For angled multi-unit
CLEM 4800-2	Cobalt chrome For angled multi-unit



POLISHING PROTECTOR

CODE

PPM 01



1

LABORATORY SCREW

CODE	DIAM. (mm)
PL 1405 Short	1.4
PTMA 13-1 Long	1.4



1

10 N.cm

RETAINING SCREW

CODE	HEIGHT (mm)	
PRH 20	2.0	For angled multi-unit



1

10 N.cm

RETAINING SCREW PACK 4

CODE	HEIGHT (mm)	
PRH 30	3.0	For straight multi-unit



1

MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMA



1

MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMAC



DIGITAL ANALOG MULTI-UNIT ABUT

CODE

ADMA



1

10 N.cm

TITANIUM INTERFACE MULTI-UNIT ABUT

CODE	LENGTH (mm)
IMAT 04	4.0
IMAT 06	6.0



1

10 N.cm

CHROME INTERFACE MULTI-UNIT ABUT

CODE	LENGTH (mm)
IMAC 04	4.0
IMAC 06	6.0

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

2



Driver Handpiece P/ Abut. Medium (CTA 1224)



Driver Ratchet F/ Abut. Short (CDAC 20)




Driver Ratchet F/ Abut. Medium (CDAC 24)

3



Driver Handpiece Hex. 1.2mm Nar. Short (CTHA 1220)



Driver Handpiece Hex. 1.2mm Nard. Medium (CTHA 1224)



Driver Ratchet Hex. 1.2mm Nar. Short (CHTMA 20)



Driver Ratchet Hex. 1.2mm Medium (CHTMA 24)

*Check product availability in your country.

VERSALIS S LONG

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

MT 16° LONG PROSTHETIC SEQUENCE

DIRECT SEQUENCE OVER THE IMPLANT (ANALOGIC)

Single restorations



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3820	IVMT 3820N	3.8	20.0
IVMT 3822	IVMT 3822N	3.8	22.0
IVMT 3824	IVMT 3824N	3.8	24.0
IVMT 4020	IVMT 4020N	4.0	20.0
IVMT 4022	IVMT 4022N	4.0	22.0
IVMT 4024	IVMT 4024N	4.0	24.0
IVMT 4320	IVMT 4320N	4.3	20.0
IVMT 4322	IVMT 4322N	4.3	22.0
IVMT 4324	IVMT 4324N	4.3	24.0



1

TITANIUM HEALING CAP

CODE	DIAM. (mm)	LENGTH (mm)
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0



1

10 N.cm

PEEK HEALING CAP

CODE	PROFILE DIAM. (mm)	LENGTH (mm)
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



1

OPEN TRAY TRANSFER

CODE	DIAM. (mm)
TMAIM 35C	3.5
TMAIM 45C	4.5



1

CLOSED TRAY TRANSFER

CODE	DIAM. (mm)
TMFIM 35C	3.5
TMFIM 45C	4.5



ANALOG

CODE
ANMP 3800



1

20 N.cm

TEMPORARY TITANIUM CYLINDER

CODE	DIAM. (mm)	LENGTH (mm)
CPTM 3501 - H	3.5	1.0
CPTM 3502 - H	3.5	2.0
CPTM 3503 - H	3.5	3.0
CPTM 3504 - H	3.5	4.0
CPTM 4501 - H	4.5	1.0
CPTM 4502 - H	4.5	2.0
CPTM 4503 - H	4.5	3.0
CPTM 4504 - H	4.5	4.0



1

20 N.cm

17° ANGLED CEMENTED ABUTMENT

CODE	DIAM. (mm)	LENGTH (mm)
AIAM 3501C-H	3.5	1.0
AIAM 3502C-H	3.5	2.0
AIAM 3503C-H	3.5	3.0
AIAM 3504C-H	3.5	4.0
AIAM 3505C-H	3.5	5.0
AIAM 4501C-H	4.5	1.0
AIAM 4502C-H	4.5	2.0
AIAM 4503C-H	4.5	3.0
AIAM 4504C-H	4.5	4.0
AIAM 4505C-H	4.5	5.0



1

20 N.cm

STRAIGHT CEMENTED ABUTMENT

CODE	DIAM. (mm)	LENGTH (mm)
AIMP 3501C-H	3.5	1.0
AIMP 3502C-H	3.5	2.0
AIMP 3503C-H	3.5	3.0
AIMP 3504C-H	3.5	4.0
AIMP 3505C-H	3.5	5.0
AIMP 4501C-H	4.5	1.0
AIMP 4502C-H	4.5	2.0
AIMP 4503C-H	4.5	3.0
AIMP 4504C-H	4.5	4.0
AIMP 4505C-H	4.5	5.0



1

20 N.cm

CO-CR ABUTMENT (NO INTERNAL THREAD)

CODE	DIAM. (mm)	LENGTH (mm)
EUCLAM 3501 - H	3.5	1.0
EUCLAM 3502 - H	3.5	2.0
EUCLAM 3503 - H	3.5	3.0
EUCLAM 3504 - H	3.5	4.0
EUCLAM 4501 - H	4.5	1.0
EUCLAM 4502 - H	4.5	2.0
EUCLAM 4503 - H	4.5	3.0
EUCLAM 4504 - H	4.5	4.0



1

LABORATORY SCREW

CODE
PTMAML 16 Long
PTL 16 Short
1.6mm screw

1

20 N.cm

RETAINING SCREW

CODE
PT 16
1.6mm screw

DRIVERS



1

Driver Handpiece Hex. 1.2mm Short (CTH 1220)

Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)

Driver Ratchet Hex. 1.2mm (CDHC 24)

VERSALIS S LONG

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

*Check product availability in your country.

MT 16° LONG PROSTHETIC SEQUENCE

UNIVERSAL ABUTMENT - PRE-MADE POSTS (ANALOGIC AND DIGITAL)

Cement retained restorations



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3820	IVMT 3820N	3.8	20.0
IVMT 3822	IVMT 3822N	3.8	22.0
IVMT 3824	IVMT 3824N	3.8	24.0
IVMT 4020	IVMT 4020N	4.0	20.0
IVMT 4022	IVMT 4022N	4.0	22.0
IVMT 4024	IVMT 4024N	4.0	24.0
IVMT 4320	IVMT 4320N	4.3	20.0
IVMT 4322	IVMT 4322N	4.3	22.0
IVMT 4324	IVMT 4324N	4.3	24.0



1

TITANIUM HEALING CAP

CODE	DIAM. (mm)	HEIGHT (mm)
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0



1

10 N.cm

PEEK HEALING CAP

CODE	PROFILE DIAM. (mm)	HEIGHT (mm)
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0




1

20 N.cm

CEMENTED UNIVERSAL ABUTMENT

CODE	DIAM. (mm)	CEMENTATION LENGTH (mm)	TRANSMUCOSAL LENGTH (mm)
AIM 33401C	3.3	4.0	1.0
AIM 33402C	3.3	4.0	2.0
AIM 33403C	3.3	4.0	3.0
AIM 33404C	3.3	4.0	4.0
AIM 33405C	3.3	4.0	5.0
AIM 33601C	3.3	6.0	1.0
AIM 33602C	3.3	6.0	2.0
AIM 33603C	3.3	6.0	3.0
AIM 33604C	3.3	6.0	4.0
AIM 33605C	3.3	6.0	5.0
AIM 45401C	4.5	4.0	1.0
AIM 45402C	4.5	4.0	2.0
AIM 45403C	4.5	4.0	3.0
AIM 45404C	4.5	4.0	4.0
AIM 45405C	4.5	4.0	5.0
AIM 45601C	4.5	6.0	1.0
AIM 45602C	4.5	6.0	2.0
AIM 45603C	4.5	6.0	3.0
AIM 45604C	4.5	6.0	4.0
AIM 45605C	4.5	6.0	5.0



2

Use the 0.9 Driver

10 N.cm

17° ANGLED CEMENTED UNIVERSAL ABUTMENT

CODE	DIAM. (mm)	TRANSMUCOSAL LENGTH (mm)	CEMENTATION LENGTH (mm)
AAIM 331741C	3,3	1.5	4.0
AAIM 331742C	3,3	2.5	4.0
AAIM 331743C	3,3	3.5	4.0
AAIM 331761C	3,3	1.5	6.0
AAIM 331762C	3,3	2.5	6.0
AAIM 331763C	3,3	3.5	6.0
AAIM 451741C	4,5	1.5	4.0
AAIM 451742C	4,5	2.5	4.0
AAIM 451743C	4,5	3.5	4.0
AAIM 451761C	4,5	1.5	6.0
AAIM 451762C	4,5	2.5	6.0
AAIM 451763C	4,5	3.5	6.0



POLYACETAL TRANSFER

CODE	DIAM. (mm)	HEIGHT (MM)	
TSIT 3340	3.3	4.0	yellow
TSIT 3360	3.3	6.0	blue
TSIT 4540	4.5	4.0	yellow
TSIT 4560	4.5	6.0	blue



GRADE 5 TITANIUM ANALOG

CODE	DIAM. (mm)	HEIGHT (MM)
ASIT 3340	3.3	4.0
ASIT 3360	3.3	6.0
ASIT 4540	4.5	4.0
ASIT 4560	4.5	6.0



TEMPORARY ACRYLIC CYLINDER

CODE	DIAM. (mm)	HEIGHT (MM)
CPSIT 3340	3.3	4.0
CPSIT 3360	3.3	6.0
CPSIT 4540	4.5	4.0
CPSIT 4560	4.5	6.0



CALCINABLE POLYACETAL CYLINDER

CODE	DIAM. (mm)	HEIGHT (MM)
CCSIT 3340	3.3	4.0
CCSIT 3360	3.3	6.0
CCSIT 4540	4.5	4.0
CCSIT 4560	4.5	6.0



UNIVERSAL ABUTMENT SCANNING JIG

CODE	DIAM. (mm)	HEIGHT (mm)
JBSIT 3340	3.3	4.0
JBSIT 3360	3.3	6.0
JBSIT 4540	4.5	4.0
JBSIT 4560	4.5	6.0



UNIVERSAL ABUTMENT DIGITAL ANALOG


CODE	DIAM. (mm)	HEIGHT (mm)
ADUA 3340	3.3	4.0
ADUA 3360	3.3	6.0
ADUA 4540	4.5	4.0
ADUA 4560	4.5	6.0

DRIVERS

1



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)



Driver Handpiece Hex. 1.2mm Long (CTH 1230)



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

2



Driver Handpiece Hex. 0.9mm Medium (CTH 0924)



Driver Ratchet Hex0.9 Short (CCH 0920)



Driver Ratchet Hex0.9 Long (CCH 0924)

VERSALIS S LONG

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

*Check product availability in your country.

VERSALIS S SURGICAL KIT
ONE KIT FOR ALL LENGTHS

Includes two torque wrench options, choose your preferred workflow.



Dual-ended depth probe, one side for standard implants, the other for extra-long implants

Unique drills with DLC (Diamond like carbon): Less bone heating, increased durability and high cutting power.



Included at 17°, 30° and 45° ID, for precise planning in anatomical challenges

VERSALIS S SURGICAL KIT
ORGANIZING BOX





1 LANCE DRILL Ø2.0MM (FRL 20)
2 HELICAL DRILL Ø2.0MM (FRH 20)
3 CONICAL DRILL Ø3.5MM SOFT (FRCV 35S)
4 CONICAL DRILL Ø3.8MM SOFT (FRCV 38S)
5 CONICAL DRILL Ø4.0MM SOFT (FRCV 40S)
6 CONICAL DRILL Ø4.3MM SOFT (FRCV 43S)
7 CONICAL DRILL Ø5.0MM SOFT (FRCV 50S)
8 CONICAL DRILL Ø6.0MM SOFT (FRCV 60S)
9 CONICAL DRILL Ø7.0MM SOFT (FRCV 70S)
10 LINDEMANN DRILL (FRLI 01)
11 CONICAL DRILL Ø3.5MM HARD (FRCV 35H)
12 CONICAL DRILL Ø3.8MM HARD (FRCV 38H)
13 CONICAL DRILL Ø4.0MM HARD (FRCV 40H)
14 CONICAL DRILL Ø4.3MM HARD (FRCV 43H)
15 CONICAL DRILL Ø5.0MM HARD (FRCV 50H)
16 RATCHET DRIVER IMP. MT SHORT (CCMT 01C)
17 COUNTERSINK DRILL Ø3.5MM (FRCTV 35)
18 COUNTERSINK DRILL Ø3.8MM (FRCTV 38)
19 COUNTERSINK DRILL Ø4.0MM (FRCTV 40)
20 COUNTERSINK DRILL Ø4.3MM (FRCTV 43)
21 COUNTERSINK DRILL Ø5.0MM (FRCTV 50)
22 LANCE DRILL Ø2.0MM LONG (FRLL 20)
23 RATCHET DRIVER IMP. MT LONG (CCMT 01L)
24 DIRECTION INDICATOR 3.5mm (ID 35)
25 DIRECTION INDICATOR 3.8mm (ID 38)
26 DIRECTION INDICATOR 4.0mm (ID 40)
27 DIRECTION INDICATOR 4.3mm (ID 43)
28 DIRECTION INDICATOR 5.1mm (ID 50)
29 HELICAL DRILL Ø2.0MM LONG (FRHL 20)
30 HANDPIECE DRIVER IMP. MT16° SHORT (CTMT 01C)
31 CONICAL DRILL Ø3.8MM LONG (FRCVL 38)
32 HANDPIECE DRIVER IMP. MT16° LONG (CTMT 01L)
33 CONICAL DRILL Ø4.0MM LONG (FRCVL 40)
34 GENGIVAL HEIGHT MT16° (MTCM 16)
35 ANGLED DIRECTION INDICATOR 17° (IDA 17)
36 ANGLED DIRECTION INDICATOR 30° (IDA 30)
37 ANGLED DIRECTION INDICATOR 45° (IDA 45)
38 CONICAL DRILL Ø4.3MM LONG (FRCVL 43)
39 DRIVER EXTENSOR OF DRILL (EXFN 03)
40 HANDPIECE DRIVER HEX.1.2MM MEDIU (CTH 1224)
41 DIGITAL DRIVER HEX.1.2 MEDIUM (CDH 1224)
42 HANDPIECE DRIVER ABUT. MEDIUM (CTA 1224)
43 SURGICAL TORQUE RATCHET (TMECC 01EN)
44 SURGICAL TORQUE RATCHET (TMECC 02)
45 DEPTH PROBE STANDARD/LONG (SOP 02)

GET TO KNOW OUR COMPLEMENTARY KITS



PROSTHETIC KIT

Ideal for the restorative phase with precision, agility, and safety.
Code: KTMEC 02




EXPANDER KIT

Ideal for performing lateral bone expansion, helping to avoid the need for bone grafts.
Code: KEXP



BONE GRAFT KIT

Used for the stabilization of block bone grafts and for guided bone regeneration surgery.
Code: KENX

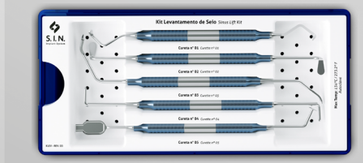


SINUS LIFT KIT

Indicated for sinus lift surgeries, this kit enables displacement of the sinus membrane, as well as graft curettage and compaction.
Code: KLEV 02



OSTEOTOME KIT

Enables atraumatic maxillary sinus elevation, resulting in vertical bone gain.
Code: KOST



ROTARY EXPANDER KIT

Indicated for cases with limited bone thickness. Recommended for bone expansion and compaction, helping to avoid the need for bone grafting.
Code: KER



ORTHODONTIC KIT

Designed for simple surgical installation and removal of mini screws, assisting in orthodontic treatment.
Code: KOR

WANT TO KNOW MORE? SCAN THE QR CODE NEXT TO IT



INSTRUMENTAL OF COMPLEMENTARY KITS

DIGITAL SCREWDRIVERS

ITEM	CODE	DESCRIPTION	LENGTH	INDICATION
	CDA 20	ABUTMENT SCREWDRIVER 20.0MM	SHORT	Used to set the mini-abutment and conical abutment screw
	CDA 24	ABUTMENT SCREWDRIVER 24.0MM	LONG	Used to set the mini-abutment and conical abutment screw
	CDH 0920	HEXAGONAL DIGITAL SCREWDRIVER 20.0MM	SHORT	Used for installation of Externa Hex. Tryon implant cover, two-pieces straight universal abut and angled universal abut.
	CDH 0924	HEXAGONAL DIGITAL SCREWDRIVER 24.0MM	LONG	Used for installation of Externa Hex. Tryon implant cover, two-pieces straight universal abut and angled universal abut.
	CDH 1220	HEXAGONAL DIGITAL SCREWDRIVER 20.0MM	SHORT	Used to set the mounting piece, healing, transfer, retaining screw (PTL 16, PT 2006, PT 2008, PRH 20 and PRH 30) and lab screws. 1.2mm hexagonal tip
	CDH 1224	HEXAGONAL DIGITAL SCREWDRIVER 24.0MM	LONG	Used to set the mounting piece, healing, transfer, retaining screw (PTL 16, PT 2006, PT 2008, PRH 20 and PRH 30) and lab screws. 1.2mm hexagonal tip
	CDHA 1220	HEX. DIGITAL SCREWDRIVER 20.0MM ANG. MINI-ABUTMENT	SHORT	Used to set the angular mini-abutment screw 1.2mm hexagonal tip (except for the Unitite angular mini-abutment).
	CDHA 1224	HEX. DIGITAL SCREWDRIVER 24.0MM ANG. MINI-ABUTMENT	LONG	Used to set the angular mini-abutment screw 1.2mm hexagonal tip (except for the Unitite angular mini-abutment).
	CDHA 1237	HEX. DIGITAL SCREWDRIVER 37.0MM ANG. MINI-ABUTMENT	EXTRA LONG	Used to set the angular mini-abutment screw 1.2mm hexagonal tip (except for the Unitite angular mini-abutment).
	CDQ 1220	SQUARE DIGITAL SCREWDRIVER 20.0MM	SHORT	Used to set the square-fit retaining screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip

SURGICAL HAMMER

ITEM	CODE	DESCRIPTION
	MART 1	> Surgical-grade stainless steel used with Osteotome and Expander kits. > Contact end made of synthetic material that provides improved sensitivity, less impact and reduced trauma during use.

*Check product availability in your country.


DIGITAL SCREWDRIVERS

ITEM	CODE	DESCRIPTION	LENGTH	INDICATION
	CDQ 1224	SQUARE DIGITAL SCREWDRIVER 24.0MM	LONG	Used to set the square-fit locking screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip
	CDQ 1237	SQUARE DIGITAL SCREWDRIVER 37.0MM	EXTRA LONG	Used to set the square-fit locking screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip
	CLH 1277	HEX. SCREWDRIVER 77.0MM	EXTRA LONG	Lab screwdriver. Used to set retaining screws (PTL 16, PT 2006, PT 2008, PRH 20 and PRH 30) and lab screws. 1.2mm hexagonal tip
	CLQ 1277	HEX. SCREWDRIVER 77.0MM	EXTRA LONG	Lab screwdriver. Used to set the square-fit retaining screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip
	CRC 16	PROVISIONAL CYLINDER REMOVAL SCREWDRIVER	SHORT	Used to remove 1.6mm Morse Taper (16°) provisional cylinder
	CRC 18	PROVISIONAL CYLINDER REMOVAL SCREWDRIVER	SHORT	Used to remove the 1.8 mm Morse Taper 11,5° provisional cylinder
	CDH 1620	HEX DIGITAL SCREWDRIVER 16MM	SHORT	Used to install the Multifunctional Abutment. 1.6mm Hexagonal Tip
	CDH 1624	HEX DIGITAL SCREWDRIVER 16MM	MEDIUM	Used to install the Multifunctional Abutment. 1.6mm Hexagonal Tip
	CCH 1620	HEX RATCHET WRENCH 16MM	SHORT	Used for the installation and torque of the Multifunctional Abutment. 1.6mm Hexagonal Tip
	CCH 1624	HEX RATCHET WRENCH 16MM	MEDIUM	Used for the installation and torque of the Multifunctional Abutment. 1.6mm Hexagonal Tip
	CCH 1420A	DRIVER RATCHET HEX1.4	SHORT	Use Angle TI Base
	CCH 1424A	DRIVER RATCHET HEX1.4	MEDIUM	Use Angle TI Base
	CCH 1430A	DRIVER RATCHET HEX1.4	LONG	Use Angle TI Base
	CCH 1437A	DRIVER RATCHET HEX1.4	EXTRA LONG	Use Angle TI Base

SURGICAL HAMMER

ITEM	CODE	DESCRIPTION
	MART 1	> Surgical-grade stainless steel used with Osteotome and Expander kits. > Contact end made of synthetic material that provides improved sensitivity, less impact and reduced trauma during use.

BONE PROFILING MILLING CUTTERS

ITEM	CODE	DESCRIPTION	INDICATION
	PO 4150	Platform 4.1 mm – External Hex.	Opens bone profile to 5.0 mm
	PO 5055	Platform 5.0 mm – External Hex.	Opens bone profile to 5.5 mm
	POCM 45	Platform CM 11.5° - Morse Taper	Opens bone profile to 4.5 mm
	POCM 50	Platform CM 11.5° - Morse Taper	Opens bone profile to 5.0 mm
	POCM 55	Platform CM 11.5° - Morse Taper	Opens bone profile to 5.5 mm
	POCM 65	Platform CM 11.5° - Morse Taper	Opens bone profile to 6.5 mm
	POMT 45	Platform MT 16° - Morse Taper	Opens bone profile to 4.5 mm
	POMT 50	Platform MT 16° - Morse Taper	Opens bone profile to 5.0 mm
	POMT 55	Platform MT 16° - Morse Taper	Opens bone profile to 5.5 mm
	POMT 65	Platform MT 16° - Morse Taper	Opens bone profile to 6.5 mm

*Check product availability in your country.

COUNTER-ANGLE SCREWDRIVER

ITEM	CODE	DESCRIPTION	LENGTH	INDICATION
	CTA 1224	ABUTMENT TORQUE SCREWDRIVER 24.0MM	LONG	Used to set the mini-abutment and conical abutment screw
	CTH 0924	COUNTER-ANGLE HEXAGONAL TORQUE SCREWDRIVER 24.0MM	LONG	Used for installation of Externa Hex. Tryon implant cover, two-pieces straight universal abut and angled universal abut.
	CTH 1220	COUNTER-ANGLE HEXAGONAL TORQUE SCREWDRIVER 20.0MM	SHORT	Used to set the mounting piece, healing, transfer, retaining screws (PTL 16, PT 2006, PT 2008, PRH 20 and PRH 30) and lab screws. 1.2mm hexagonal tip
	CTH 1224	COUNTER-ANGLE HEXAGONAL TORQUE SCREWDRIVER 24.0MM	LONG	Used to set the mounting piece, healing, transfer, retaining screws (PTL 16, PT 2006, PT 2008, PRH 20 and PRH 30) and lab screws. 1.2mm hexagonal tip
	CTH 1230	COUNTER-ANGLE HEXAGONAL TORQUE SCREWDRIVER 30.0MM	EXTRA LONG	Used to set the mounting piece, healing, transfer, retaining screws (PTL 16, PT 2006, PT 2008, PRH 20 and PRH 30) and lab screws. 1.2mm hexagonal tip
	CTHA 1220	ANGULAR MINI-ABUTMENT COUNTER-ANGLE HEXAGONAL TORQUE SCREWDRIVER 20.0MM	SHORT	Used to set the angular mini-abutment screw 1.2mm hexagonal tip (except for the Unitite angular mini-abutment).
	CTHA 1224	ANGULAR MINI-ABUTMENT COUNTER-ANGLE HEXAGONAL TORQUE SCREWDRIVER 24.0MM	LONG	Used to set the angular mini-abutment screw 1.2mm hexagonal tip (except for the Unitite angular mini-abutment).
	CTH 1420A	DRIVER HANDPIECE HEX.1.4MM	SHORT	Use to Angled Ti Base
	CTH 1424A	DRIVER HANDPIECE HEX.1.4MM	MEDIUM	Use to Angled Ti Base
	CTH 1430A	DRIVER HANDPIECE HEX.1.4MM	LONG	Use to Angled Ti Base
	CTH 1437A	DRIVER HANDPIECE HEX.1.4MM	EXTRA LONG	Use to Angled Ti Base
	CTQ 20	SQUARE TORQUE SCREWDRIVER 20.0MM	SHORT	Used counter-angle to set square-fit retaining screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip
	CTQ 24	SQUARE TORQUE SCREWDRIVER 24.0MM	LONG	Used counter-angle to set square-fit retaining screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip
	CTQ 30	SQUARE TORQUE SCREWDRIVER 30.0MM	EXTRA LONG	Used counter-angle to set square-fit retaining screws (PTQ 2008, PTQH 18 and PTQ 2006). 1.3mm tip

HELICAL MILLING CUTTERS

ITEM	CODE	MEASUREMENTS	DESCRIPTION
	FH 2010	ø 2,0x 10,0 mm	> Surgical-grade stainless steel > Thermal treatment > Laser markings > Used as a sequence to make the alveolus
	FH2020	ø 2,0x 18,0 mm	
	FH3010	ø 3,0x 10,0 mm	
	FH3020	ø 3,0x 18,0 mm	

TREPHINE MILLING CUTTERS

ITEM	CODE	MEASUREMENTS	DESCRIPTION
	FTR 02	ø 2,0 mm	> Surgical-grade stainless steel > Thermal treatment > Laser markings > May be used for implant removal, bone removal, and bone biopsy > Measures refer to the inner diameter of the part
	FTR04	ø 4,2 mm	
	FTR 05	ø 5,1 mm	
	FTR 06	ø 6,1 mm	
	FTR 08	ø 8,0 mm	

*Check product availability in your country.

NEW IMPLANT CAPTURE SYSTEM:
SAFER AND MORE PRACTICAL

S.I.N. packaging provides practicality by maintaining product integrity, facilitating handling and identification.



› 01 Packaging that is easier to open and handle with gloves.



› 02 Transparent packaging: Easy identification of the implant, which will be attached to the inner part of the cap by a titanium support.

› 03 Top-opening system with a rotating mechanism that ensures the implant's sterilization. When opening the cap, the implant must be carefully removed from the tube to avoid contact.



› 04 With a specific connector adapted to the contra-angle, fit it until achieving a tight connection with the implant's prosthetic interface.

› 05 Perform a breaking motion, which will cause the titanium support to snap and release the implant from the tube cap. No trace of the material will be found at the apex of the implant.



› 06 Implant system that offers the implant and the healing cap in separate compartments, but within the same packaging. To retrieve it, remove the upper cap of the tube and fit the 1.2 mm digital hex driver.

SUPERIOR QUALITY AND TECHNOLOGY

WE WARRANT, BECAUSE WE ARE PROUD OF OUR PRODUCTS.

LIFETIME WARRANTY · HIGH QUALITY STANDARDS ·


S.I.N. main priority is assuring the quality and safety to our clients. Offering the best for implants, components, surgical kits and tooling is the base of all our action.

INSPECTION IN A 100% OF THE BATCHES MANUFACTURED

We apply rigorous quality control to all S.I.N. products, ensuring success in surgeries for our clients, meeting the highest quality standards, and adding value to those who choose to restore smiles.

IMPLANTS WITH WARRANTY FOR LIFE*

5 YEARS OF WARRANTY PROSTHESIS COMPONENTS*

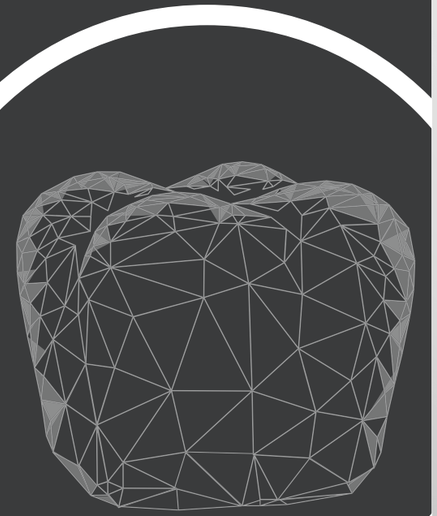


*SCAN THE LATERAL QR CODE TO ACCESS S.I.N WARRANTYTERMS OR ACCESS THE LINK https://www.sinimplantsystem.com/lifetime-warranty/

TORQUE WRENCH CLEANING PROCEDURES

The ratchet must be disassembled and cleaned immediately after every use. For proper cleaning, disassemble multi-piece instruments into their single parts. No tools are necessary for this process.


Pull the steering reversing rod back.

› 01




Remove the Ratchet from the socket with your head.


› 02



Rotate the fixing nut counterclockwise.


› 03





Remove the central shaft of the torqueratchet.

› 04




Remove the torque grading rod.

› 05

Start the cleaning and washing procedure.

› 06




› 01

Turn the torque wrench cylinder counter-clockwise until it is completely free.

› 02

After loosening the cylinder, remove the torque wrench body and head.



› 03

Begin the cleaning and washing procedure.

Cleaning must be performed immediately after using the torque wrench. For proper cleaning, disassemble the torque wrench. No tools are required for this action. After complete drying, assemble the torque wrench following the same disassembly procedures in reverse order.

GENERAL INSTRUCTIONS

Special care and clarification on surgical instruments.

CLEANING KIT CASE

- Manually remove all surgical instruments from the kit. Wash the kit trays separately.
- Prepare the enzymatic detergent, according to manufacturer's recommendation.
- Immerse the trays into the prepared detergent solution and keep in contact for at least 5 minutes, then using a soft bristle brush, scrub the parts to remove organic matter from the products.
- Remove the parts from the detergent solution and rinse with tap water for 1 minute until the residue is completely removed. Repeat the rinse two more times.
- Visual inspection of each part for cleaning process residue or organic waste from product use.
- If residue is detected in the product, repeat the cleaning process until the residue is completely removed.
- Dry with a soft, clean, dry cloth or disposable paper.

CLEANING SURGICAL INSTRUMENTS

- Disassemble the product (if applicable). For the torque wrench, disassembly it completely, remove all the internal organic matter using tap water and follow to the next step only after performing such procedures.
- Prepare the enzymatic detergent according to the manufacturer's recommendation.
- Immerse all parts of the product into the prepared detergent solution and keep in contact for at least 5 minutes, then using soft bristle brush, scrub the parts to remove organic matter from the products.
- Remove parts from detergent solution and rinse with tap water for 1 minute, repeat the rinse for two more times, a total of three rinses of 1 minute each.
- Visual inspection of each part for cleaning process residue or organic waste from product use.
- If residue is detected in the product, repeat the cleaning process until the residue is completely removed.
- Dry with a soft, clean, dry cloth or disposable paper.
- Follow to sterilization process.

STERILIZATION

- Reusable Product and provided non-sterile.
- It must be clean and sterilized in autoclave before use.
- Dry all instruments before the steam sterilization cycle.
- The product must be enclosed in a steam sterilizable wrap.
- Steam sterilize in cycles of 121°C at 1 ATM pressur for 30 minutes or of 134°C at 2 ATM pressure for 20 minutes. Drying time 30 minutes.
- Always accommodate the case in autoclave over a plane surface and away of device walls.
- Never stack objects or other cases.

CLEANING RECOMMENDATION

- Use the proper PPEs (gloves, masks, goggles, caps, etc.).
- Start the cleaning right after the surgical use.
- Never let the instruments dry with organic waste after the surgical use.
- Never let the instrument dry naturally after cleaning.
- Never use saline solutions, include sodium hypochlorite, disinfectant, hydrogen peroxide or alcohol for cleaning or rinsing the surgical instruments and Kits.
- Never use steel wool and abrasive products, so that the instruments are not damaged.
- Do not stack the instruments in lots to avoid the deformation of smaller and delicate pieces.

STERILIZATION RECOMMENDATIONS

- Sterilize the products in the same day or one day earlier the procedure.
- The chemical sterilization is not recommended, once some products may cause the discoloration and damages to the case.
- Do not use temperature higher than 60°C to drying process.
- Do not use dry heat stoves for sterilization of the instruments and kits from S.I.N.

SCIENTIFIC PUBLICATIONS

› **THE IMPACT OF BIOACTIVE SURFACES IN THE EARLY STAGES OF OSSEOINTEGRATION: AN IN VITRO COMPARATIVE STUDY EVALUATING THE HANANO® AND SLACTIVE® SUPER HYDROPHILIC SURFACES**
Rodrigo A. da Silva, Geórgia da Silva Feltran, Marcel Rodrigues Ferreira, Patrícia Fretes Wood, Fabio Bezerra and Willian F. Zambuzzi.
Hindawi BioMed Research International – 2020

› **FAILURE MODES AND SURVIVAL OF ANTERIOR CROWNS SUPPORTED BY NARROW IMPLANT SYSTEMS**
Edmara T. P. Bergamo, Everardo N. S. de Araújo-Júnior, Adolfo C. O. Lopes, Paulo G. Coelho, Abbas Zahoui, Ernesto B. Benalcázar Jalkh and Estevam A. Bonfante. Hindawi BioMed Research International – 2020

› **CLINICAL, HISTOLOGICAL, AND NANOMECHANICAL PARAMETERS OF IMPLANTS PLACED IN HEALTHY AND METABOLICALLY COMPROMISED PATIENTS**
Rodrigo Granato, Edmara T.P. Bergamo, Lukasz Witek, Estevam A. Bonfante, Charles Marin, Michael Greenberg, Gregory Kurgansky, Paulo G. Coelho. *Clinical Oral Implants Research - 2011*

› **BIOMATERIAL AND BIOMECHANICAL CONSIDERATIONS TO PREVENT RISKS IN IMPLANT THERAPY**
Estevam A. Bonfante | Ryo Jimbo | Lukasz Witek | Nick Tovar | Rodrigo Neiva | Andrea Torroni | Paulo G. Coelho
Clinical Oral Implants Research - 2013

› **DIFFERENTIAL INFLAMMATORY LANDSCAPE STIMULUS DURING TITANIUM SURFACES-OBTAINED OSTEOGENIC PHENOTYPE**
Georgia da S. Feltran[1], Fábio Bezerra[1], Célio Júnior da Costa Fernandes[1], Marcel Rodrigues Ferreira[1], Willian F. Zambuzzi[1].
2019

› **THE BIOLOGICAL RESPONSE TO THREE DIFFERENT NANOSTRUCTURES APPLIED ON SMOOTH IMPLANT SURFACES**
Ryo Jimbo, Javier Sotres, Carina Johansson, Karin Breding, Fredrik Currie, Ann Wennerberg. Periodontology 2000

› **NANO HYDROXYAPATITE-BLASTED TITANIUM SURFACE AFFECTS PRE-OSTEOBLAST MORPHOLOGY BY MODULATING CRITICAL INTRACELLULAR PATHWAYS**
Fábio Bezerra, Marcel R. Ferreira, Giselle N. Fontes, Celio Jr da Costa Fernandes, Denise C. Andia, Nilson C. Cruz, Rodrigo A. da Silva, Willian F. Zambuzzi. *Biotechnology and Bioengineering, 2017*

› **EVALUATION OF A TITANIUM SURFACE TREATED WITH HYDROXYAPATITE NANOCRYSTALS ON OSTEOBLASTIC CELL BEHAVIOR: AN IN VITRO STUDY**
Elizabeth Ferreira Martinez, Guilherme Junji Ishikawa, Alexandre Barboza de Lemos, Fábio José Barbosa Bezerra, Marcelo Sperandio, Marcelo Henrique Napimoga. *The International Journal of Oral & Maxillofacial Implants – 2017*

› **GENETIC RESPONSES TO NANOSTRUCTURED CALCIUM-PHOSPHATE-COATED IMPLANTS**
R. Jimbo, Y. Xue, M. Hayashi, H. O. Schwartz-Filho, M. Andersson, K. Mustafa and A. Wennerberg. *Journal of Dental Research – 2011*

› **HISTOLOGICAL AND THREE-DIMENSIONAL EVALUATION OF OSSEOINTEGRATION TO NANOSTRUCTURED CALCIUM PHOSPHATE-COATED IMPLANTS**
Ryo Jimbo, Paulo G. Coelho, Stefan Vandeweghe, Humberto Osvaldo Schwartz-Filho, Mariko Hayashi, Daisuke Ono, Martin Andersson, Ann Wennerberg. *Acta Biomaterialia - 2011*

› **NANO HYDROXYAPATITE STRUCTURES INFLUENCE EARLY BONE FORMATION**
Luiz Meirelles, Anna Arvidsson, Martin Andersson, Per Kjellin, Tomas Albrektsson,Ann Wennerberg. Journal of Biomedical Materials Research 2008

› **NANO HYDROXYAPATITE-COATED IMPLANTS IMPROVE BONE NANOMECHANICAL PROPERTIES**
R. Jimbo, P.G. Coelho, M. Bryington, M. Baldassarri, N. Tovar, F. Currie, M. Hayashi, M. Andersson, D. Ono, S. Vandeweghe and A. Wennerberg.
Journal of Dental Research - 2012

› **TOPOGRAPHY AND SURFACE ENERGY OF DENTAL IMPLANTS: A METHODOLOGICAL APPROACH**
Tarsis Prado Barbosa · Marina Melo Naves · Helder Henrique Machado Menezes · Pedro Henrique Cunha Pinto · José Daniel Biasoli de Mello · Henara Lillian Costa. *Technical Paper - 2017*

› **OOSSEOINTEGRATION: HIERARCHICAL DESIGNING ENCOMPASSING THE MACROMETER, MICROMETER AND NANOMETER LENGTH SCALES**
Paulo G. Coelho, Ryo Jimbo, Nick Tovar, Estevam A. Bonfante. *Dental Materials - 2015*

› **BUCCAL AND LINGUAL BONE LEVEL ALTERATIONS AFTER IMMEDIATE IMPLANTATION OF FOUR IMPLANT SURFACES: A STUDY IN DOGS**
Estevam A. Bonfante, Malvin N. Janal, Rodrigo Granato, Charles Marin, Marcelo Suzuki, Nick Tovar, Paulo G. Coelho.

› **CLINICAL, HISTOLOGICAL AND NANOMECHANICAL PARAMETERS OF IMPLANTS PLACED IN HEALTHY AND METABOLICALLY COMPROMISED PATIENTS**
Rodrigo Granato, Edmara T.P. Bergamo, Lukasz Witek, Estevam A. Bonfante, Charles Marin , Michael Greenberg, Gregory Kurgansky, Paulo G. Coelho. *Journal of Dentistry – 2020*

OUR GLOBAL PRESENCE



POINT YOUR PHONE'S CAMERA AT THE
QRCODE AND SEE WHERE S.I.N. IS PRESENT

S.I.N. USA

7755 E Gray Rd, Scottsdale, AZ 85260
1-866-507-9315 | orders@sindentalusa.com

S.I.N.

Avenida Vereador Abel Ferreira, 2140

Jardim Anália Franco - São Paulo - SP - CEP 03340-000

sin360.us | sinimplantsystem.com

S.I.N. S.I.N.360°

Get to know Implantat, the educational streaming of S.I.N.

implantat.global

1-866-507-9315

sin360.us | sinimplantsystem.com

Visit our social networks

@sindentalUSA @sindentalUSA @sindentalusa