

S.I.N. 360

Versalis

A SMART COMBINATION OF DESIGN AND VERSATILITY.

Versalis implants by S.I.N. combine high performance and clinical versatility. Its design includes a conical core, dual-tapered body, and cutting apex for strong bi-cortical engagement in all bone types. It was engineered with the help from leading USA clinicians to deliver an implant for both beginner and advanced professionals.




Easy Bicortical Engagement

Dual taper body and aggressive apical design ensure easier bicortical anchorage, even in challenging bone anatomy.



Dual Thread:

Faster insertion, stable from the start.
Less time placing, more time producing.



Exclusive Plus Surface:

Developed in the main universities of Sweden, the Plus surface which is produced by double acid-etching followed by application of a hydroxyapatite coating HAnano, proven by over 50 preclinical studies.



From 8.5 to 24 mm. One Surgical Kit:

Standard or long, all lengths installed with the same kit.



An Implant with Diverse Possibilities:

Morse Taper 16° connection making your clinical day-to-day easier.





Cutting Apex for Maximum Primary Stability:

No extra steps. No over-prep. Versalis cuts its own path and achieves high initial stability with minimal bone trauma.




Hybrid Design, Smarter Mechanics:

A dual-tapered body that balances compression and stress distribution, offering better bone-implant contact and long-term success, enhanced by the ultra-thin Surface Plus, treated with double acid-etching and HAnano coating.



Manufactured in Cold Worked Grade IV Titanium:

Super light metal, very resistant to corrosion, wear and fracture.



Full Surface Treatment:

Double acid etching on the entire surface.

MT 16º PROSTHETIC SEQUENCE

DIRECT SEQUENCE OVER THE IMPLANT (ANALOG)

SINGLE RESTORATIONS



IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4,0	8.5
IVMT 4010	IVMT 4010N	4,0	10.0
IVMT 4011	IVMT 4011N	4,0	11.5
IVMT 4013	IVMT 4013N	4,0	13.0
IVMT 4015	IVMT 4015N	4,0	15.0
IVMT 4018	IVMT 4018N	4,0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5,0	8.5
IVMT 5010	IVMT 5010N	5,0	10.0
IVMT 5011	IVMT 5011N	5,0	11.5
IVMT 5013	IVMT 5013N	5,0	13.0
IVMT 5015	IVMT 5015N	5,0	15.0
IVMT 5018	IVMT 5018N	5,0	18.0
IVMT 6085	IVMT 6085N	6,0	8.5
IVMT 6010	IVMT 6010N	6,0	10.0
IVMT 6011	IVMT 6011N	6,0	11.5
IVMT 6013	IVMT 6013N	6,0	13.0
IVMT 7085	IVMT 7085N	7,0	8.5
IVMT 7010	IVMT 7010N	7,0	10.0
IVMT 7011	IVMT 7011N	7,0	11.5
IVMT 7013	IVMT 7013N	7,0	13.0

*Check product availability in your country.



WIDE HEALING ABUTMENT

CODE	DIAM. (mm)	LENGTH (mm)
CIM 5501C	5.5	1.0
CIM 5502C	5.5	2.0
CIM 5503C	5.5	3.0
CIM 5504C	5.5	4.0
CIM 5505C	5.5	5.0
CIM 5506C	5.5	6.0



TITANIUM HEALING CAP

CODE	DIAM. (mm)	LENGTH (mm)
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0

10 N.cm

PEEK HEALING CAP

CODE	PROFILE DIAM. (mm)	LENGTH (mm)
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



OPEN TRAY TRANSFER

CODE	DIAM. (mm)
TMAIM 35C	3.5
TMAIM 45C	4.5



CLOSED TRAY TRANSFER

CODE	DIAM. (mm)
TMFIM 35C	3.5
TMFIM 45C	4.5



ANALOG

CODE
ANMP 3800



20 N.cm

TEMPORARY TITANIUM CYLINDER

CODE	DIAM. (mm)	LENGTH (mm)
CPTM 3501 - H	3.5	1.0
CPTM 3502 - H	3.5	2.0
CPTM 3503 - H	3.5	3.0
CPTM 3504 - H	3.5	4.0
CPTM 4501 - H	4.5	1.0
CPTM 4502 - H	4.5	2.0
CPTM 4503 - H	4.5	3.0
CPTM 4504 - H	4.5	4.0



20 N.cm

STRAIGHT CEMENTED ABUTMENT

CODE	DIAM. (mm)	LENGTH (mm)
AIMP 3501C-H	3.5	1.0
AIMP 3502C-H	3.5	2.0
AIMP 3503C-H	3.5	3.0
AIMP 3504C-H	3.5	4.0
AIMP 3505C-H	3.5	5.0
AIMP 4501C-H	4.5	1.0
AIMP 4502C-H	4.5	2.0
AIMP 4503C-H	4.5	3.0
AIMP 4504C-H	4.5	4.0
AIMP 4505C-H	4.5	5.0



20 N.cm

CO-CR ABUTMENT (NO INTERNAL THREAD)

CODE	DIAM. (mm)	LENGTH (mm)
EUCLAM 3501 - H	3.5	1.0
EUCLAM 3502 - H	3.5	2.0
EUCLAM 3503 - H	3.5	3.0
EUCLAM 3504 - H	3.5	4.0
EUCLAM 4501 - H	4.5	1.0
EUCLAM 4502 - H	4.5	2.0
EUCLAM 4503 - H	4.5	3.0
EUCLAM 4504 - H	4.5	4.0



LABORATORY SCREW

CODE
PTMAML 16
PTL 16




20 N.cm

RETAINING SCREW

CODE
PT 16

DRIVERS

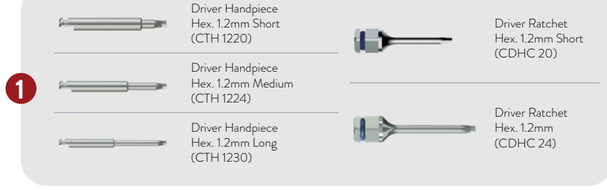

- Driver Handpiece Hex. 1.2mm Short (CTH 1220)
- Driver Handpiece Hex. 1.2mm Medium (CTH 1224)
- Driver Handpiece Hex. 1.2mm Long (CTH 1230)
- Driver Ratchet Hex. 1.2mm Short (CDHC 20)
- Driver Ratchet Hex. 1.2mm (CDHC 24)

VERSALIS S

* Analog sequence
* Digital sequence

* Hex driver
* Anti-Rotational component
* Squared Screw
* Abutment Screw
* Rotational component

MT 16º PROSTHETIC SEQUENCE

DIRECT SEQUENCE OVER THE IMPLANT (DIGITAL)

SINGLE RESTORATIONS



IVMT xxxx

IVMT xxxxN

IMPLANT

CODE VERSALIS S	*CODE VERSALIS S PLUS*	*DIAM. (mm)*	*LENGTH (mm)*
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4,0	8.5
IVMT 4010	IVMT 4010N	4,0	10.0
IVMT 4011	IVMT 4011N	4,0	11.5
IVMT 4013	IVMT 4013N	4,0	13.0
IVMT 4015	IVMT 4015N	4,0	15.0
IVMT 4018	IVMT 4018N	4,0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5,0	8.5
IVMT 5010	IVMT 5010N	5,0	10.0
IVMT 5011	IVMT 5011N	5,0	11.5
IVMT 5013	IVMT 5013N	5,0	13.0
IVMT 5015	IVMT 5015N	5,0	15.0
IVMT 5018	IVMT 5018N	5,0	18.0
IVMT 6085	IVMT 6085N	6,0	8.5
IVMT 6010	IVMT 6010N	6,0	10.0
IVMT 6011	IVMT 6011N	6,0	11.5
IVMT 6013	IVMT 6013N	6,0	13.0
IVMT 7085	IVMT 7085N	7,0	8.5
IVMT 7010	IVMT 7010N	7,0	10.0
IVMT 7011	IVMT 7011N	7,0	11.5
IVMT 7013	IVMT 7013N	7,0	13.0

*Check product availability in your country.



1

WIDE HEALING ABUTMENT

CODE	*DIAM. (mm)*	*LENGTH (mm)*
CIM 5501C	5.5	1.0
CIM 5502C	5.5	2.0
CIM 5503C	5.5	3.0
CIM 5504C	5.5	4.0
CIM 5505C	5.5	5.0
CIM 5506C	5.5	6.0



1

TITANIUM HEALING CAP

CODE	*DIAM. (mm)*	*LENGTH (mm)*
CIM 3502C	3.5	2.0
CIM 3504C	3.5	4.0
CIM 3506C	3.5	6.0
CIM 4502C	4.5	2.0
CIM 4504C	4.5	4.0
CIM 4506C	4.5	6.0

1

10 N.cm

PEEK HEALING CAP

CODE	*PROFILE DIAM. (mm)*	*LENGTH (mm)*
CPCM 0504	5.0	4.0
CPCM 0804	8.0	4.0
CPCM 0508	5.0	8.0
CPCM 0808	8.0	8.0



1

MT 16° SCANNING JIG

CODE

JBSWCM

1

MT 16° SCANNING JIG

CODE

JBSWCMC



DIGITAL ANALOG - MT 16°

CODE

ADCM



2

ICMT xxxx

20 N.cm

TITANIUM INTERFACE MT 16°

CODE	DESCRIPTION	TRANSMUCOSAL HEIGHT (mm)	LENGTH (mm)
ICMT 0504	0.5X4	0.5	4.0
ICMT 0506	0.5X6	0.5	6.0
ICMT 2004	2.0X4	2.0	4.0
ICMT 2006	2.0X6	2.0	6.0
ICMT 3004	3.0X4	3.0	4.0
ICMT 3006	3.0X6	3.0	6.0



2

ICMTA xxxx ICMTA xxxxS ICMTA xxxxR ICMTA xxxxW

20 N.cm

ANGLED TITANIUM INTERFACE MT 16°

CODE	LENGTH (mm)	DIAMETER (mm)	COLLAR (mm)
ICMTA xxxx	1-4	3.5	4-6
ICMTA xxxxS	1-4	4.0	4-6
ICMTA xxxxR	1-4	4.5	4-6
ICMTA xxxxW	1-4	5.5	4-6



1

20 N.cm

TITANIUM INTERFACE MT 16° SIRONA

S.I.N. PLATFORM	DESCRIPTION	TRANSMUCOSAL HEIGHT (mm)	LENGTH (mm)	SIRONA LIBRARY
ICM 0804	0.8x4.0	0.8	4.0	ATOS 3.5/4.0 – ATOS 4.5/5.0
ICM 2004	2.0x4.0	2.0	4.0	ATOS 3.5/4.0 – ATOS 4.5/5.0



CUSTOM PREMILL ABUTMENTS

CODE	DESCRIPTION
AFTCM 1601DS	16° MT Premill Narrow (DESS)
AFTCM 1602DS	16° MT Premill Wide (DESS)
AFTCM 1601 - MK	16° Premill (Medentika)
AFTCM 1602 - MK	16° Premill (Medentika)

DRIVERS



Driver Handpiece Hex. 1.2mm Short (CTH 1220)



Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)

1



Driver Ratchet Hex. 1.2mm Short (CDHC 20)



Driver Ratchet Hex. 1.2mm (CDHC 24)

DRIVERS



Angled Ti Base Driver Handpiece Hex. 1.4mm Short (CTH 1420A)

Angled Ti Base Driver Handpiece Hex. 1.4mm Medium (CTH 1424A)

Angled Ti Base Driver Handpiece Hex. 1.4mm Long (CTH 1430A)


Angled Ti Base Driver Handpiece Hex. 1.4mm Extra Long (CTH 1437A)

2



Angled Ti Base Ratchet Driver Hex. 1.4mm Short (CCH 1420A)

Angled Ti Base Ratchet Driver Hex. 1.4mm Medium (CCH 1424A)



Angled Ti Base Ratchet Driver Hex. 1.4mm Long (CCH 1430A)

Angled Ti Base Ratchet Driver Hex. 1.4mm Extra Long (CCH 1437A)

VERSALIS S

* Analog sequence

* Digital sequence

* Hex driver

* Anti-Rotational component

* Squared Screw

* Abutment Screw

* Rotational component

* Angled Ti Base Drivers

MT 16º PROSTHETIC SEQUENCE

MULTI-UNIT ABUTMENT (ANALOG & DIGITAL)

MULTIPLE SCREW RETAINED RESTORATIONS



IVMT xxxx IVMT xxxxN

IMPLANT

CODE VERSALIS S	CODE VERSALIS S PLUS	DIAM. (mm)	LENGTH (mm)
IVMT 3585	IVMT 3585N	3.5	8.5
IVMT 3510	IVMT 3510N	3.5	10.0
IVMT 3511	IVMT 3511N	3.5	11.5
IVMT 3513	IVMT 3513N	3.5	13.0
IVMT 3515	IVMT 3515N	3.5	15.0
IVMT 3518	IVMT 3518N	3.5	18.0
IVMT 3885	IVMT 3885N	3.8	8.5
IVMT 3810	IVMT 3810N	3.8	10.0
IVMT 3811	IVMT 3811N	3.8	11.5
IVMT 3813	IVMT 3813N	3.8	13.0
IVMT 3815	IVMT 3815N	3.8	15.0
IVMT 3818	IVMT 3818N	3.8	18.0
IVMT 4085	IVMT 4085N	4,0	8.5
IVMT 4010	IVMT 4010N	4,0	10.0
IVMT 4011	IVMT 4011N	4,0	11.5
IVMT 4013	IVMT 4013N	4,0	13.0
IVMT 4015	IVMT 4015N	4,0	15.0
IVMT 4018	IVMT 4018N	4,0	18.0
IVMT 4385	IVMT 4385N	4.3	8.5
IVMT 4310	IVMT 4310N	4.3	10.0
IVMT 4311	IVMT 4311N	4.3	11.5
IVMT 4313	IVMT 4313N	4.3	13.0
IVMT 4315	IVMT 4315N	4.3	15.0
IVMT 4318	IVMT 4318N	4.3	18.0
IVMT 5085	IVMT 5085N	5,0	8.5
IVMT 5010	IVMT 5010N	5,0	10.0
IVMT 5011	IVMT 5011N	5,0	11.5
IVMT 5013	IVMT 5013N	5,0	13.0
IVMT 5015	IVMT 5015N	5,0	15.0
IVMT 5018	IVMT 5018N	5,0	18.0
IVMT 6085	IVMT 6085N	6,0	8.5
IVMT 6010	IVMT 6010N	6,0	10.0
IVMT 6011	IVMT 6011N	6,0	11.5
IVMT 6013	IVMT 6013N	6,0	13.0
IVMT 7085	IVMT 7085N	7,0	8.5
IVMT 7010	IVMT 7010N	7,0	10.0
IVMT 7011	IVMT 7011N	7,0	11.5
IVMT 7013	IVMT 7013N	7,0	13.0

*Check product availability in your country.

2



20 N.cm

STRAIGHT MULTI-UNIT ABUTMENT

CODE	DIAM. (mm)	HEIGHT (mm)
MAM 4801 C	4.8	1.0
MAM 4802 C	4.8	2.0
MAM 4803 C	4.8	3.0
MAM 4804 C	4.8	4.0

3



20 N.cm

INDEXED ANGLED MULTI-UNIT ABUTMENT

CODE	DIAM. (mm)	HEIGHT (mm)	ANG.
MAAM 4802I	4.8	2.0	17°
MAAM 4803I	4.8	3.0	17°
MAAM 4804I	4.8	4.0	17°
MAAM 4832I	4.8	2.0	30°
MAAM 4833I	4.8	3.0	30°
MAAM 4834I	4.8	4.0	30°

*Use hexagonal driver 1.2 mm

Additionally Available MUA Angles:
45°, 45° Slim, 52°, 60°

1



ABUTMENT PROTECTOR

CODE

PMA 4855

5.0 mm profile



OPEN TRAY TRANSFER

CODE

TMAM 4800



CLOSED TRAY TRANSFER

CODE

TMFM 4800



ANALOG

CODE

ANMA 4800



MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMA



MULTI-UNIT ABUTMENT SCANNING JIG

CODE

JBMAC



10 N.cm

TEMPORARY TITANIUM CYLINDER

CODE

PTM 4800-3	For straight multi-unit
PTMS 4800-3	For straight multi-unit Suitable for laser welding



10 N.cm

CALCINABLE AND CO-CR CYLINDER

CODE

CPM 4800-3	Plastic/For straight multi-unit
CLEM 4800-3	Cobalt chrome/For straight multi-unit



DIGITAL ANALOG MULTI-UNIT ABUT

CODE

ADMA



POLISHING PROTECTOR

CODE

PPM 01



10 N.cm

TITANIUM INTERFACE MULTI-UNIT ABUT


CODE	LENGTH (mm)
IMAT 04	4.0
IMAT 06	6.0



10 N.cm

RETAINING SCREW 4 PCK

CODE	Height (mm)	DESCRIPTION
PRH 30	3.0	For Straight Mult-Unit



Thread Length: 2.35 mm

Angulation: 25°

SMART ANGLE SCREW & ANGLED SCREW DRIVER

CODE	DESCRIPTION	HEIGHT	DIA. (mm)
MU-Screw	Prosthetic Smart Screw	4.1 mm	Ø2.3
HTK-Undr	Angled Screw Driver		



10 N.cm

LABORATORY SCREW

CODE	DIAMETER (mm)
PL 1405 SHORT	Ø1.4
PTMA 13-1 LONG	Ø1.4



10 N.cm

RETAINING SCREW 4 PCK

CODE	Height (mm)	DESCRIPTION
PRH 30	3.0	For Straight Mult-Unit




Thread Length: 2.35 mm

Angulation: 25°

SMART ANGLE SCREW & ANGLED SCREW DRIVER

CODE	DESCRIPTION	HEIGHT	DIA. (mm)
MU-Screw	Prosthetic Smart Screw	4.1 mm	Ø2.3
HTK-Undr	Angled Screw Driver		

DRIVERS

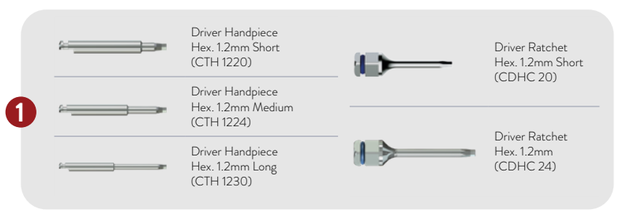

1

Driver Handpiece Hex. 1.2mm Short (CTH 1220)

Driver Handpiece Hex. 1.2mm Medium (CTH 1224)

Driver Handpiece Hex. 1.2mm Long (CTH 1230)

Driver Ratchet Hex. 1.2mm Short (CDHC 20)

Driver Ratchet Hex. 1.2mm (CDHC 24)

2

Driver Handpiece P/ Abut. Medium (CTA 1224)

Driver Ratchet F/ Abut. Short (CDAC 20)

Driver Ratchet F/ Abut. Medium (CDAC 24)

3

Driver Handpiece Hex. 1.2mm Nar. Short (CTHA 1220)

Driver Handpiece Hex. 1.2mm Nard. Medium (CTHA 1224)

Driver Ratchet Hex. 1.2mm Nar. Short (CHTMA 20)


Driver Ratchet Hex. 1.2mm Medium (CHTMA 24)

VERSALIS S

* Analog sequence
* Digital sequence


* Hex driver
* Anti-Rotational component
* Squared Screw
* Abutment Screw
* Rotational component

ONE CONNECTION PLATFORM

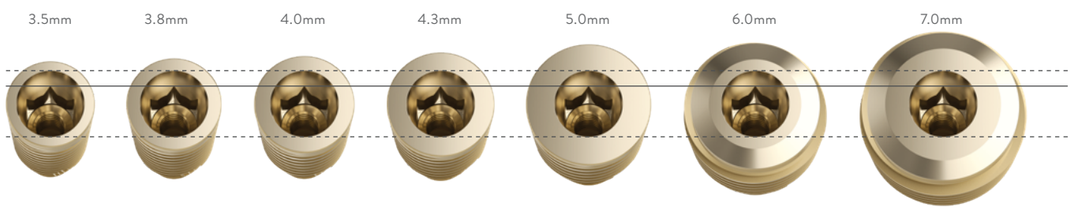

All Versalis Implants feature the 16º Morse Taper Connection with Platform Switch, providing one single connection for all implant diameters.

TECHNICAL MEASURES

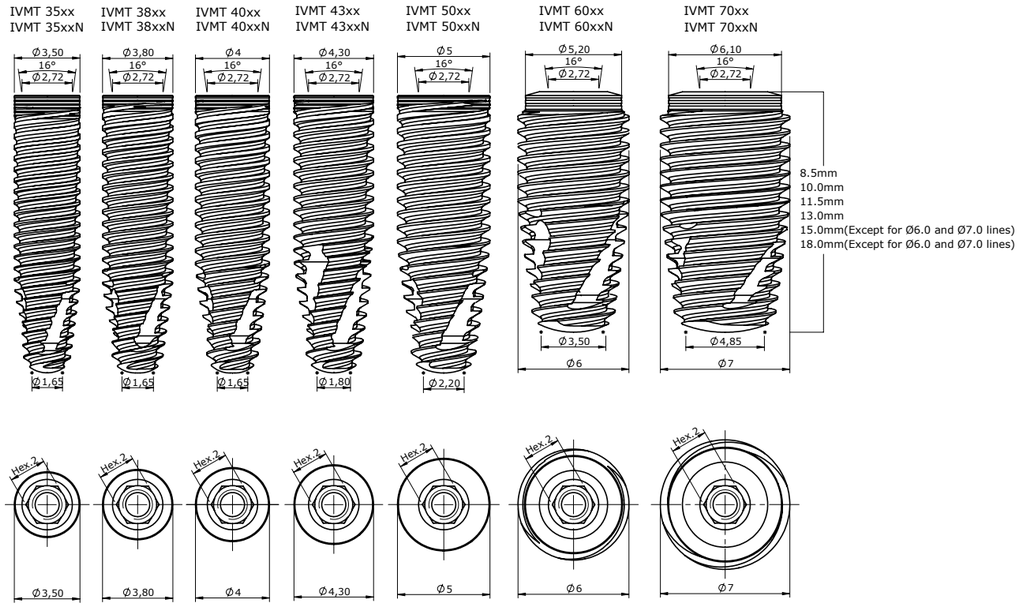

DRILLING SEQUENCE: VERSALIS LONG

BONE TYPES III AND IV



Ø DIAM. (mm)	Initial (FRLL 20)	Helical (FRHL 20)	Ø3.8 (FRCVL 38)	Ø4.0 (FRCVL 40)	Ø4.3 (FRCVL 43)
Ø3.5	●	●	● ●		
Ø3.8	●	●	●	● ●	
Ø4.0	●	●	●	●	● ●


● Optional ● Optional in case of very soft bone

Initial Drill speed of 1200 rpm


Conical Drill speed of 800 rpm

SINGLE CONNECTION SMARTER WORKFLOW

All Versalis Long Implants feature the 16º Morse Taper Connection with Platform Switch, providing one single connection for all implant diameters

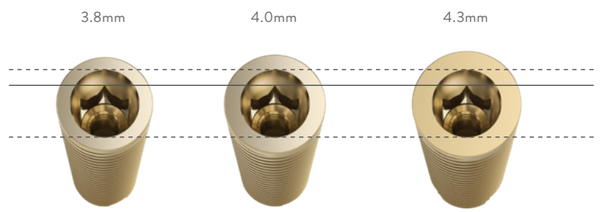

TECHNICAL MEASURES

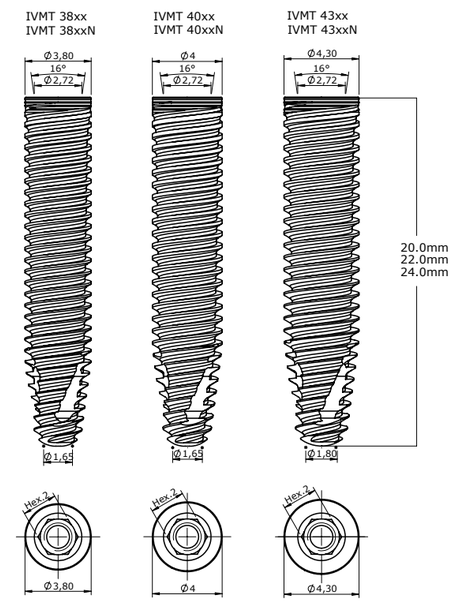

Remote Anchorage

Epikut Long RA


The **Epikut Long RA** is designed for the most challenging remote anchorage cases, including atrophic maxilla, failed implant cases, full-arch immediate-load protocols, and more. Its machined collar, aggressive macro-geometry, dual-thread technology, and narrow apex maximize cortical stability in low-density, soft bone.

Part Numbers


DAE: *ILMT xxxx*

Length (mm)	Ø Diameter (mm)			
	3.8	**4.0**	**4.2**	**4.5**
18	ILMT 3818	ILMT 4018	ILMT 4218	ILMT 4518
20	ILMT 3820	ILMT 4020	ILMT 4220	ILMT 4520
22	ILMT 3822	ILMT 4022	ILMT 4222	ILMT 4522
24	ILMT 3824	ILMT 4024	ILMT 4224	ILMT 4524



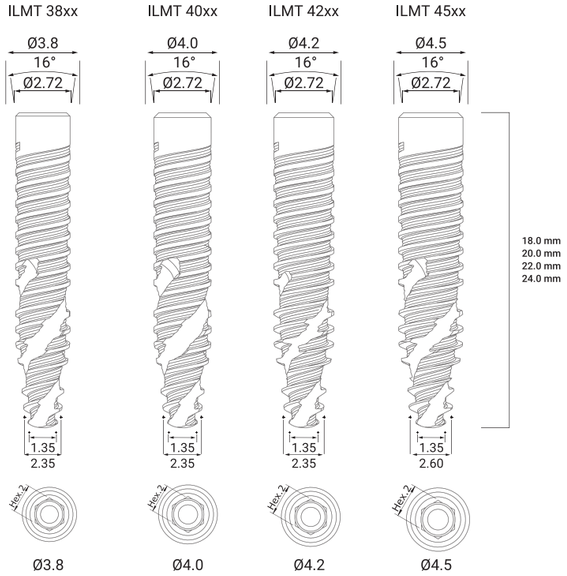



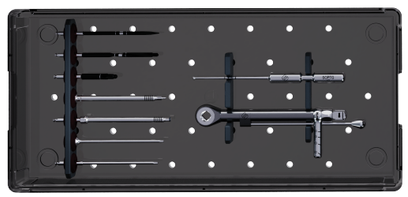

KCSEP 01

Remote Anchorage

Zygomatic

Designed for severe maxillary atrophy, the S.I.N. Zygomatic Implant anchors directly into the dense zygomatic bone, providing a stable, graft-free foundation for full-arch restorations. Its extended length and precise angulation allow clinicians to bypass sinus anatomy while maintaining optimal prosthetic alignment. Ideal for cases with minimal bone height, failed grafts, or when immediate-load protocols are needed.


Part Numbers


DAE: *ILMZ xxxxE*

Diameter: Ø4.0 mm

Length (mm)	Part Number (ILMZ xxxxE)	Length (mm)	Part Number (ILMZ xxxxE)	Length (mm)	Part Number (ILMZ xxxxE)
30	ILMZ 4030E	**40**	ILMZ 4040E	**50**	ILMZ 4050E
32.5	ILMZ 4032E	**42.5**	ILMZ 4042E	**52.5**	ILMZ 4052E
35	ILMZ 4035E	**45**	ILMZ 4045E	**55**	ILMZ 4055E
37.5	ILMZ 4037E	**47.5**	ILMZ 4047E	**57.5**	ILMZ 4057E
				60	ILMZ 4060E




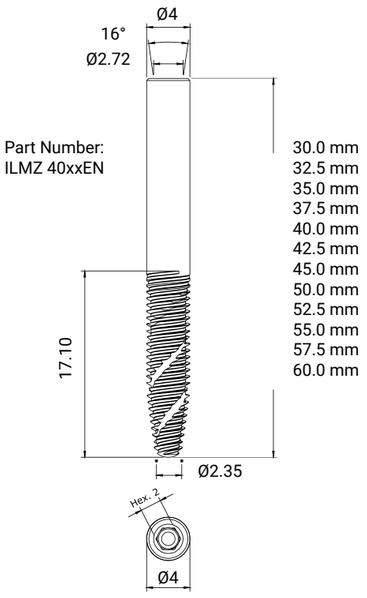


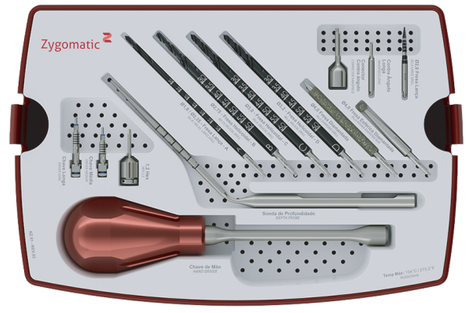

KZ 01

VERSALIS SURGICAL KIT
ORGANIZING BOX

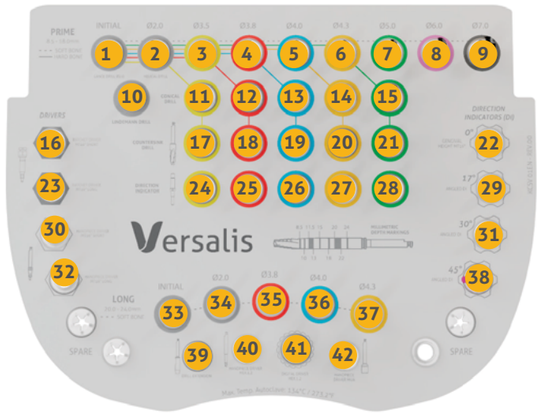

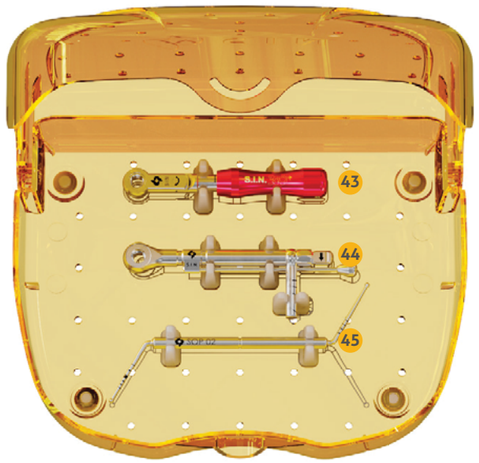

1 LANCE DRILL Ø2.0MM (FRL 20)

2 HELICAL DRILL Ø2.0MM (FRH 20)

3 CONICAL DRILL Ø3.5MM SOFT (FRCV 35S)

4 CONICAL DRILL Ø3.8MM SOFT (FRCV 38S)

5 CONICAL DRILL Ø4.0MM SOFT (FRCV 40S)

6 CONICAL DRILL Ø4.3MM SOFT (FRCV 43S)

7 CONICAL DRILL Ø5.0MM SOFT (FRCV 50S)

8 CONICAL DRILL Ø6.0MM SOFT (FRCV 60S)

9 CONICAL DRILL Ø7.0MM SOFT (FRCV 70S)

10 LINDEMANN DRILL (FRLI 01)

11 CONICAL DRILL Ø3.5MM HARD (FRCV 35H)

12 CONICAL DRILL Ø3.8MM HARD (FRCV 38H)

13 CONICAL DRILL Ø4.0MM HARD (FRCV 40H)

14 CONICAL DRILL Ø4.3MM HARD (FRCV 43H)

15 CONICAL DRILL Ø5.0MM HARD (FRCV 50H)

16 RATCHET DRIVER IMP. MT SHORT (CCMT 01C)

17 COUNTERSINK DRILL Ø3.5MM (FRCTV 35)

18 COUNTERSINK DRILL Ø3.8MM (FRCTV 38)

19 COUNTERSINK DRILL Ø4.0MM (FRCTV 40)

20 COUNTERSINK DRILL Ø4.3MM (FRCTV 43)

21 COUNTERSINK DRILL Ø5.0MM (FRCTV 50)

22 GENGIVAL HEIGHT MT.16° (MTCM 16)

23 HANDPIECE DRIVER IMP. MT.16° LONG (CCMT 01L)

24 DIRECTION INDICATOR 3.5mm (ID 35)

25 DIRECTION INDICATOR 3.8mm (ID 38)

26 DIRECTION INDICATOR 4.0mm (ID 40)

27 DIRECTION INDICATOR 4.3mm (ID 43)

28 DIRECTION INDICATOR 5.1mm (ID 50)

29 ANGLED DIRECTION INDICATOR 17° (IDA 17)

30 HANDPIECE DRIVER IMP. MT16° SHORT (CTMT 01C)

31 ANGLED DIRECTION INDICATOR 30° (IDA 30)

32 RATCHET DRIVER IMP. MT LONG (CTMT 01L)

33 LANCE DRILL Ø2.0MM LONG (FRLL 20)

34 HELICAL DRILL Ø2.0MM LONG (FRHL 20)

35 CONICAL DRILL Ø3.8MM LONG (FRCVL 38)

36 CONICAL DRILL Ø4.0MM LONG (FRCVL 40)

37 CONICAL DRILL Ø4.3MM LONG (FRCVL 43)

38 ANGLED DIRECTION INDICATOR 45° (IDA 45)

39 DRILL EXTENSOR (EXFN)

40 HANDPIECE DRIVER ABUT. MEDIUM (CTH 1224)

41 DIGITAL DRIVER HEX.1.2 MEDIUM (CDH 1224)

42 HANDPIECE DRIVER HEX.1.2MM MEDIUM (CTA 1224)

43 SURGICAL TORQUE RATCHET (TMECC 01EN)

44 SURGICAL TORQUE RATCHET (TMECC 02)

45 DEPTH PROBE STANDARD/LONG (SOP 02)

PROSTHETIC KIT
ORGANIZING BOX



1 Torque Wrench (TMEC)

2 Hex. Driver 0.9x20mm (CCH 0920)

3 Hex. Driver 1.2x24mm (CDHC 24)

4 Hex. Driver 1.2x20mm (CDHC 20)

5 Hex. Driver 1.6mm (CCH 1624)

6 Squared Driver 1.3x20mm (CQTM 20)

7 Squared Driver 1.3x24MM (CQTM 24)

8 Multi-Unit/Conical Driver (CDAC 20)

9 Angled Multi-Unit Driver 1.2mm (CHTMA 24)

10 O-Ring Driver (CCAO 20)

11 Digital Adapter (CPQ 02)

Version 2

Versalis

Shop now

S.I.N. 360°

1-866-507-9315

sin360.us | shop.sin360.us

Visit our social networks

@sin360.us